
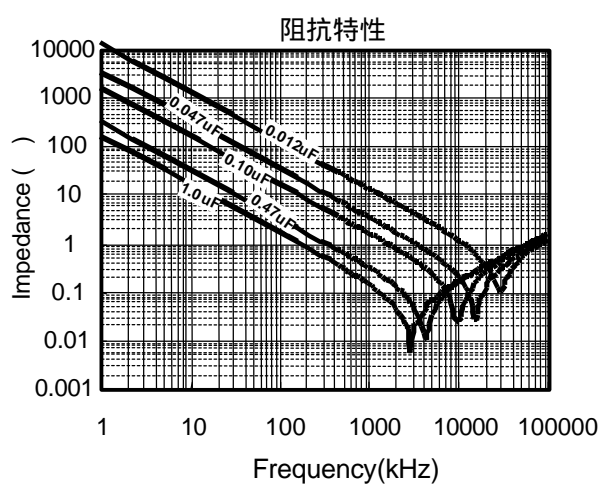
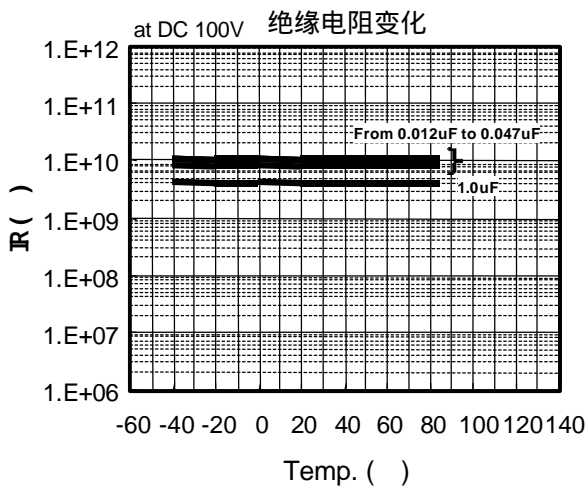
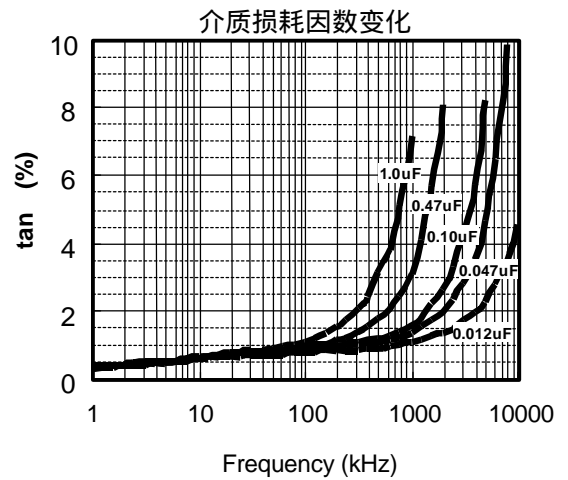
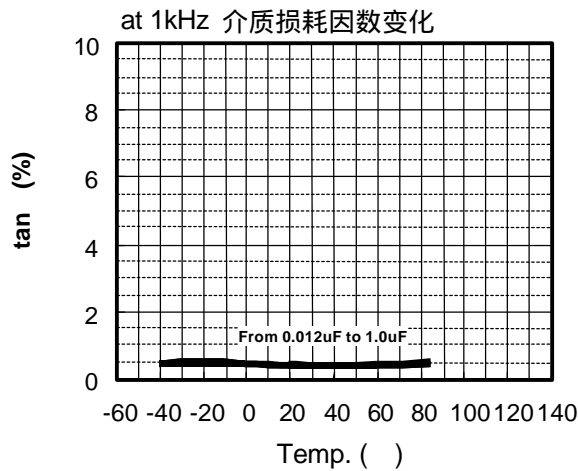
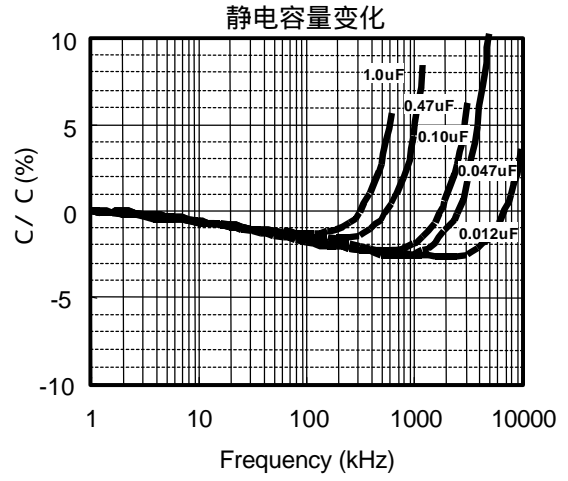


温度特性和频率特性 <代表例>


温度特性

频率特性

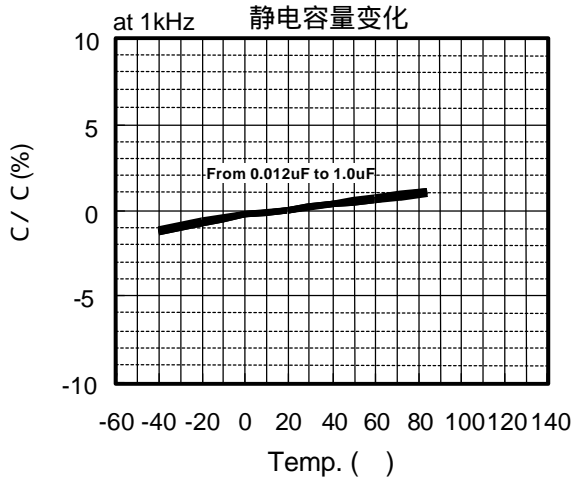


应用规格


电流容值 (有效值)

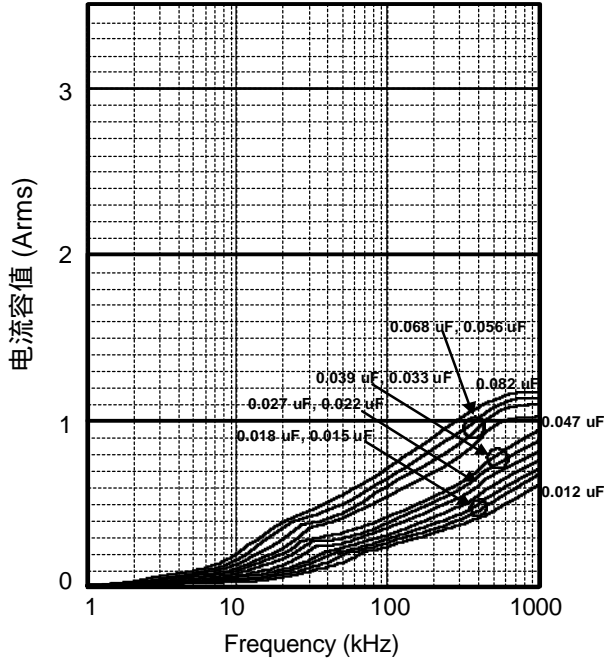


电流容值 (有效值)

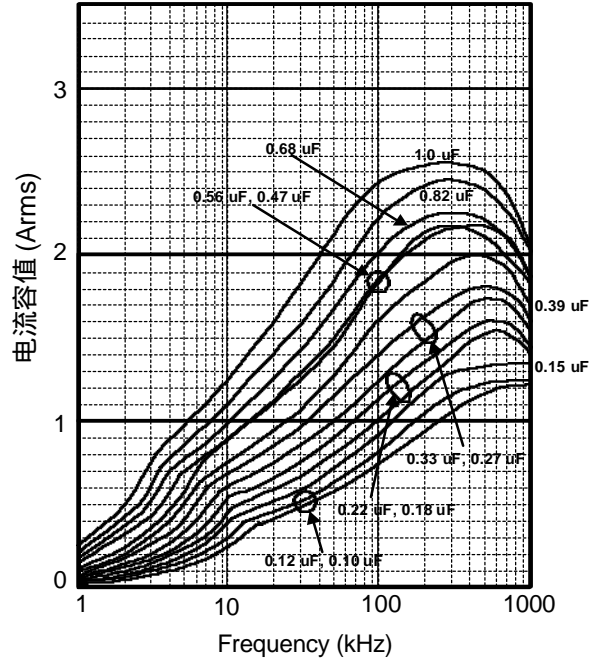

电压容值 (正弦波)

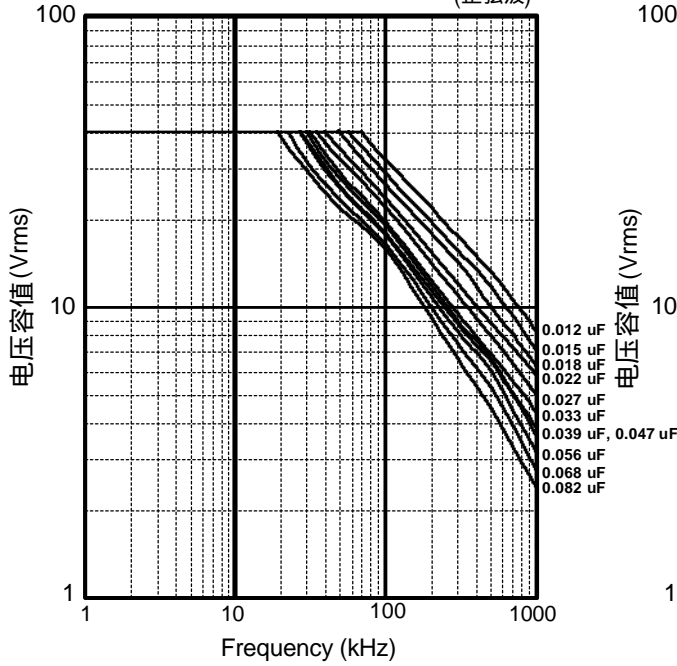

电压容值 (正弦波)

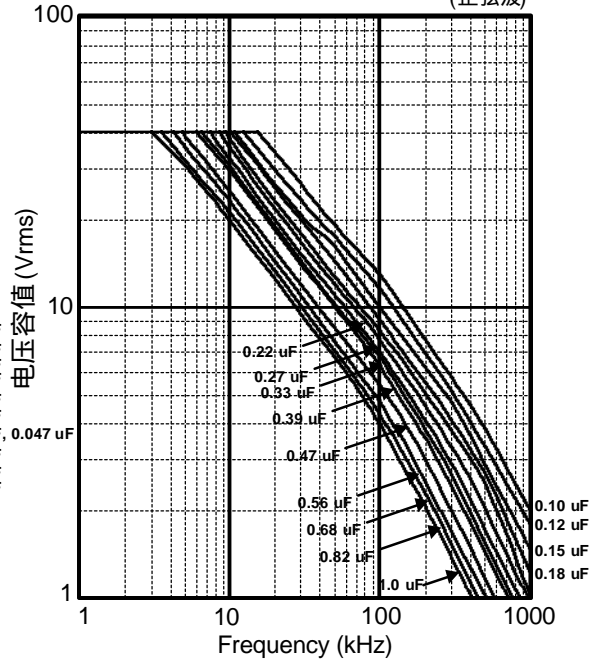

TYPE: ECWU (C) 100VDC 系列 (表面贴装型多层薄膜电容器)

应用规格


相对脉冲电流的电流容值
(脉冲次数 10,000 次以内)

额定电压	静电容量值 (μF)	代码	dv/dt(V/μs)	电流容值 (A0-p)
100V DC	0.012	123	320	3.8
	0.015	123		4.8
	0.018	183		5.8
	0.022	223		7.0
	0.027	273		8.6
	0.033	333		10.6
	0.039	393		12.5
	0.047	473		15.0
	0.056	563		17.9
	0.68	683		21.8
	0.82	823		26.2

相对脉冲电流的电流容值
(脉冲次数 10,000 次以内)




额定电压	静电容量值 (μF)	代码	dv/dt(V/μs)	电流容值 (A0-p)
100V DC	0.10	104	210	21.0
	0.12	124		25.2
	0.15	154		31.5
	0.18	184	120	21.6
	0.22	224		26.4
	0.27	274		32.4
	0.33	334		39.6
	0.39	394	100	39.0
	0.47	474		47.0
	0.56	564	70	39.2
	0.68	684		47.6
	0.82	824		57.4
	1.0	105		70.0

额定电压下降低温度



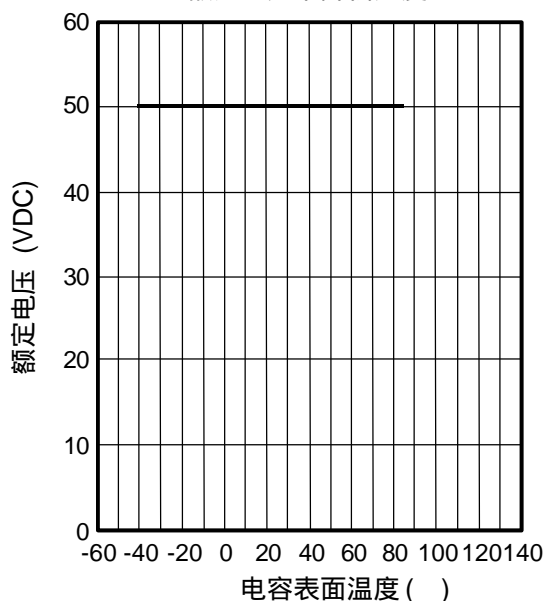


温度特性和频率特性 <代表例>

温度特性

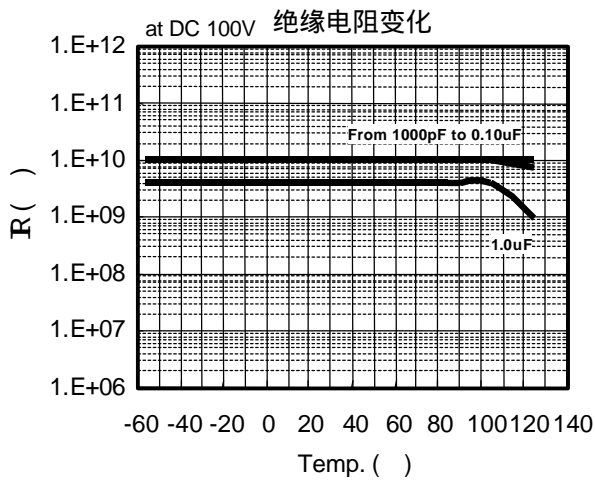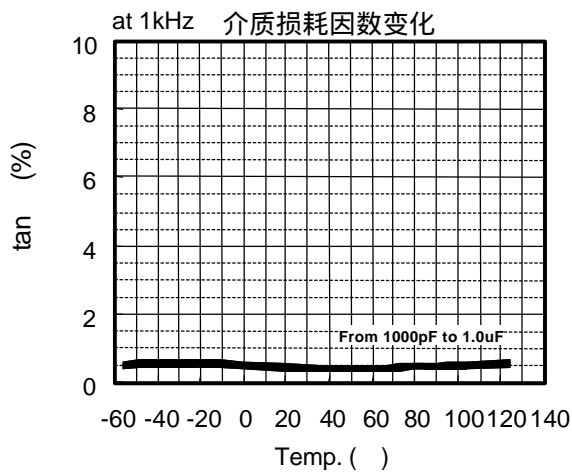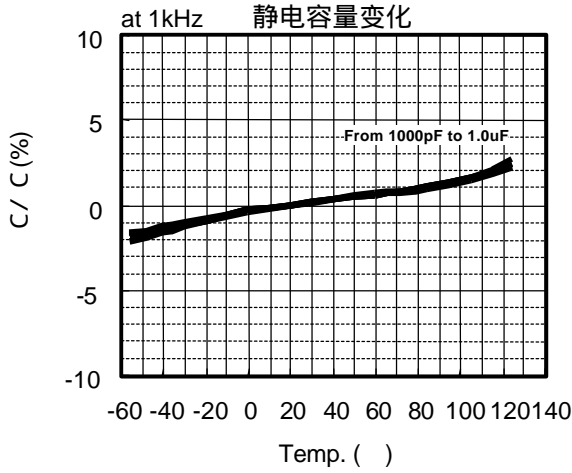


频率特性

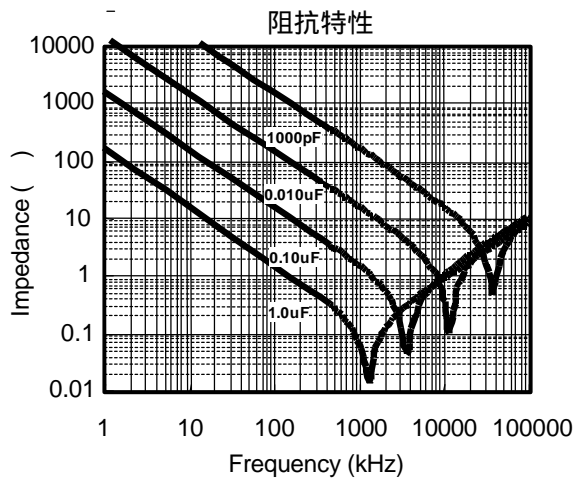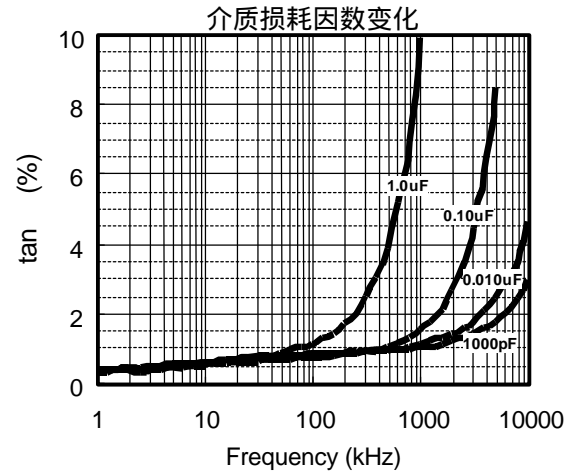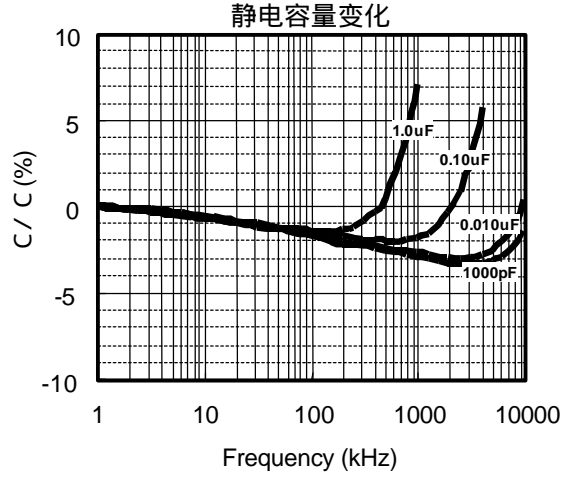


应用规格


电流容值 (有效值)

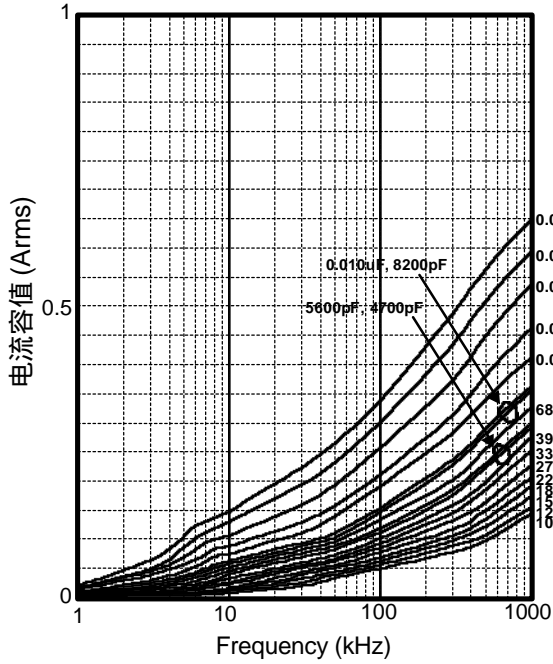


电流容值 (有效值)

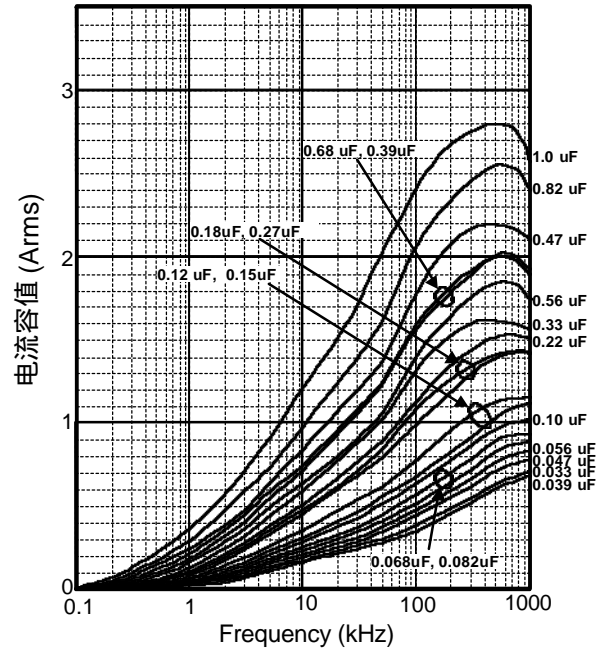

电压容值 (正弦波)

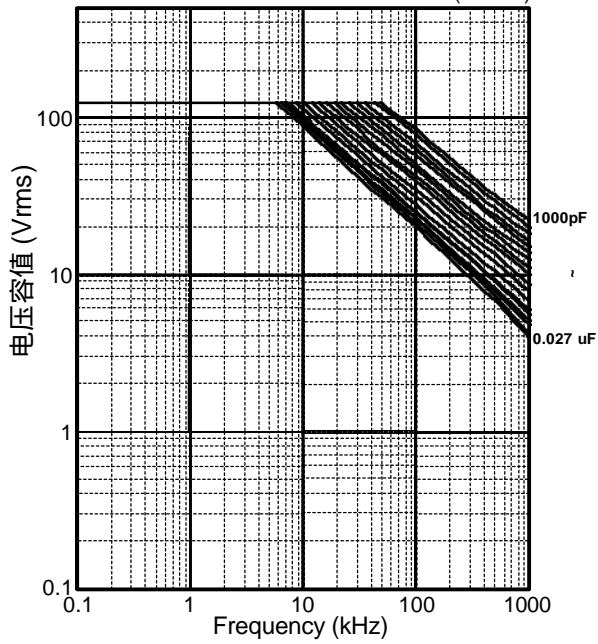

电压容值 (正弦波)

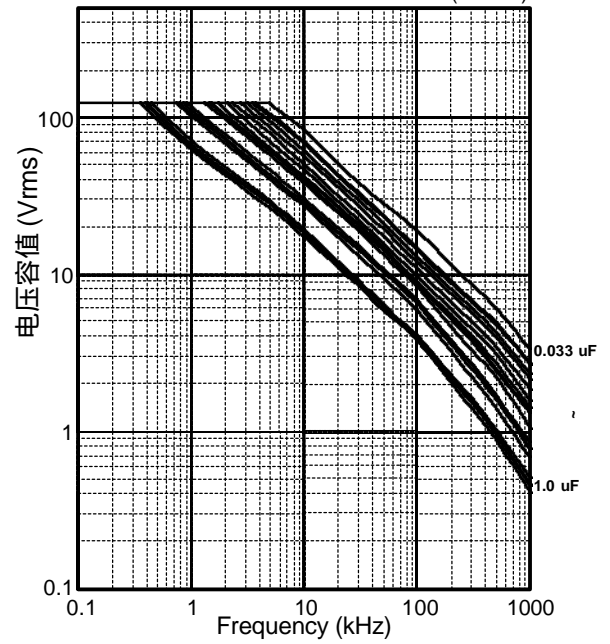


应用规格

相对脉冲电流的电流容值
(脉冲次数 10,000次以内)

额定电压	静电容量值 (μF)	代码	dv/dt(V/μs)	电流容值 (Ao-p)
250V DC	0.0010	102	615	0.62
	0.0012	122		0.74
	0.0015	152		0.92
	0.0018	182		1.11
	0.0022	222		1.35
	0.0027	272		1.66
	0.0033	332		2.03
	0.0039	392		2.40
	0.0047	472	360	1.69
	0.0056	562		2.02
	0.0068	682		2.45
	0.0082	822		2.95
	0.010	103		3.60
	0.012	123		4.32
	0.015	153		5.40
	0.018	183		6.48
	0.022	223		7.92
	0.027	273		9.72
	0.033	333		11.88


额定电压	静电容量值 (μF)	代码	dv/dt(V/μs)	电流容值 (Ao-p)
250V DC	0.039	393	240	9.36
	0.047	473		11.28
	0.056	563		13.44
	0.068	683		16.32
	0.082	823		19.68
	0.10	104		24.00
	0.12	124		28.80
	0.15	154		190
	0.18	184	34.20	
	0.22	224	41.80	
	0.27	274	115	
	0.33	334		37.95
	0.39	394		44.85
	0.47	474		54.05
	0.56	564	65	36.40
	0.68	684		44.20
	0.82	824		53.30
	1.0	105		65.00

额定电压下降低温度





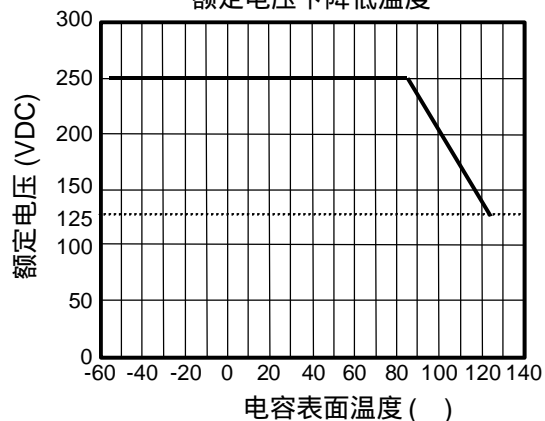


温度特性和频率特性 <代表例>

温度特性

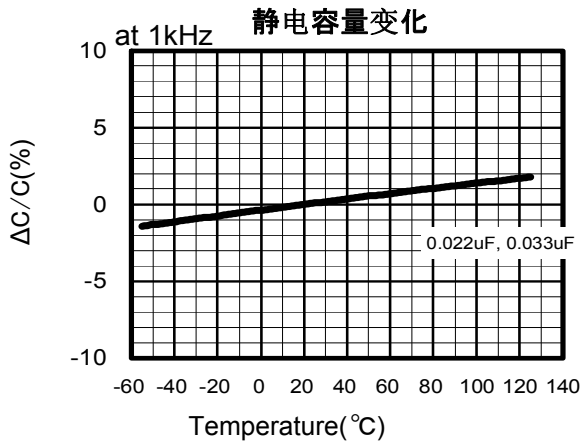


频率特性

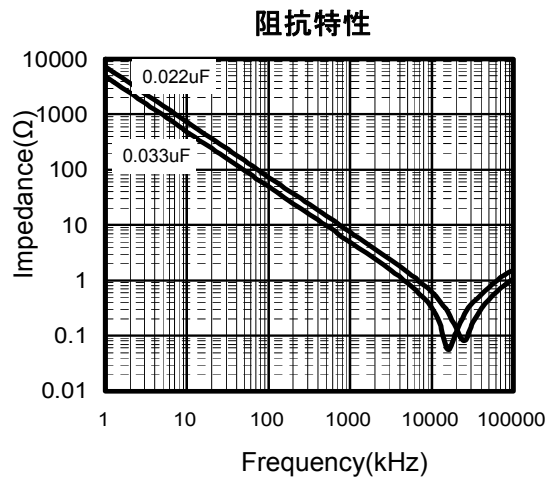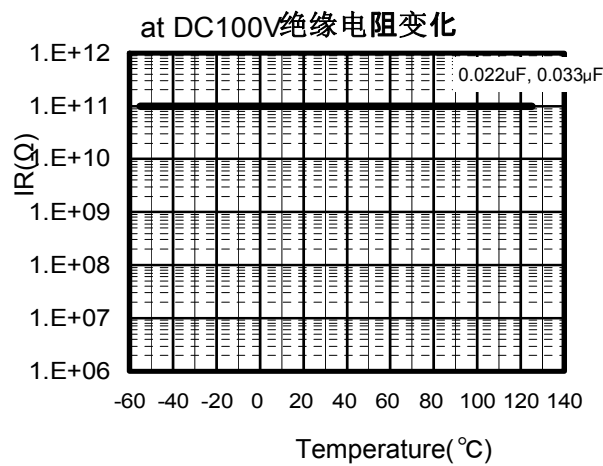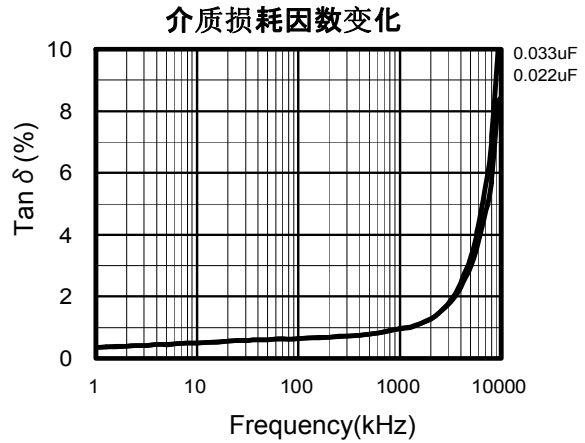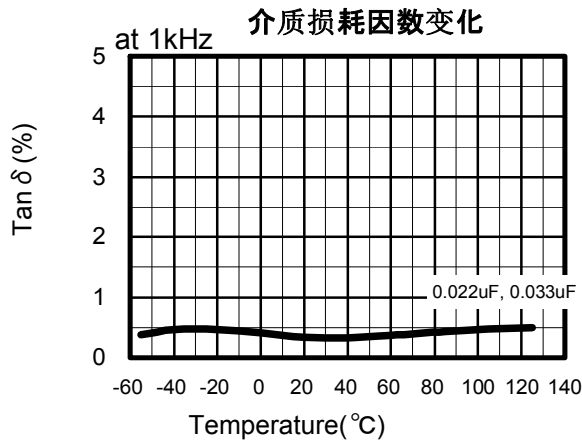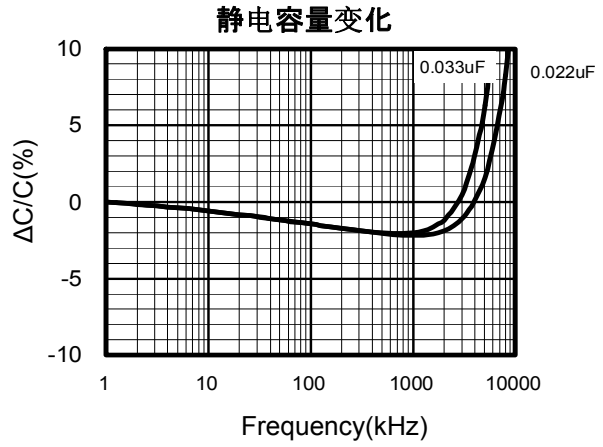

应用规格

电流容值(有效值)

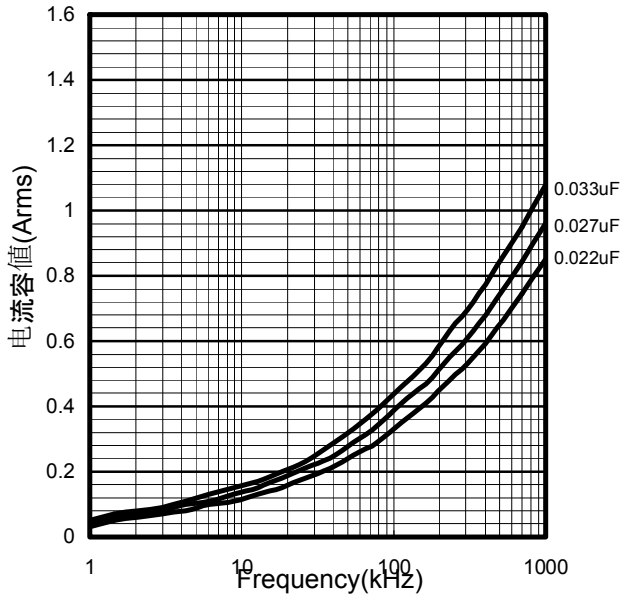

**相对脉冲电流的电流容值
(脉冲次数10000次以内)**

额定电压	静电容量值 (μF)	代码	dV/dt (V/μs)	电流容值 (A0-P)
DC 630V	0.022	223	250	5.5
	0.027	273	250	6.7
	0.033	333	250	8.2