
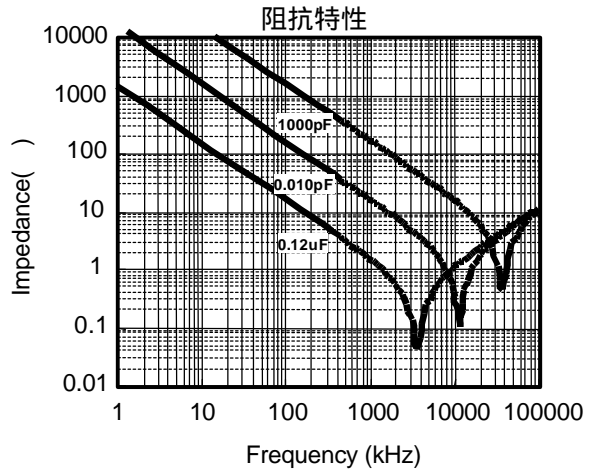
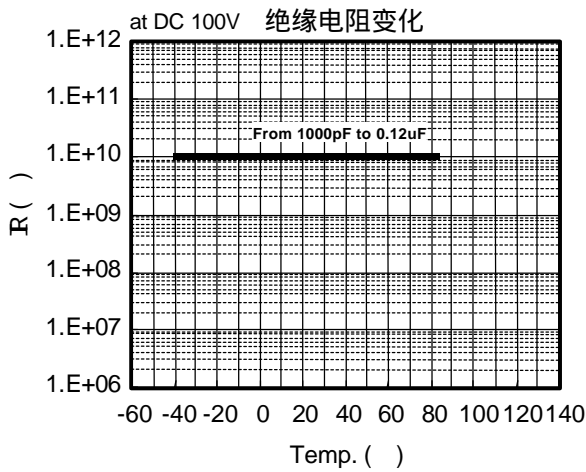
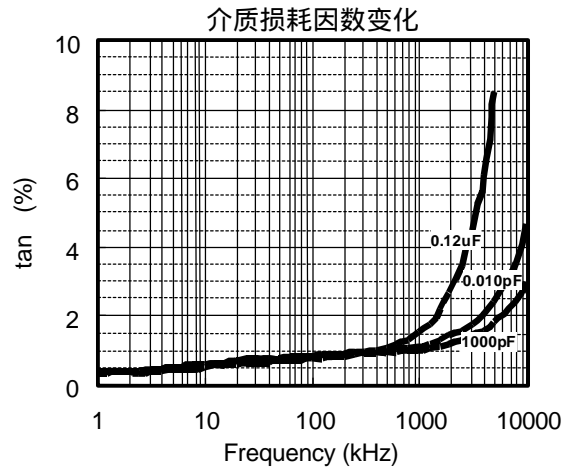
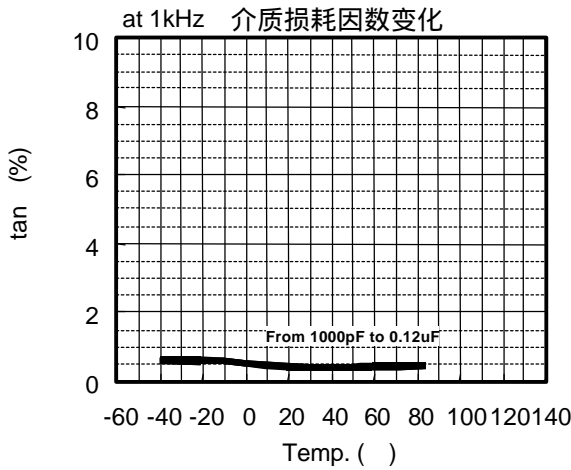
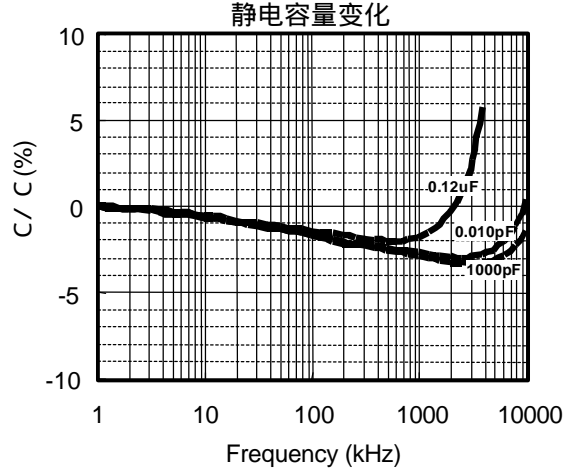


温度特性和频率特性 <代表例>


温度特性

频率特性

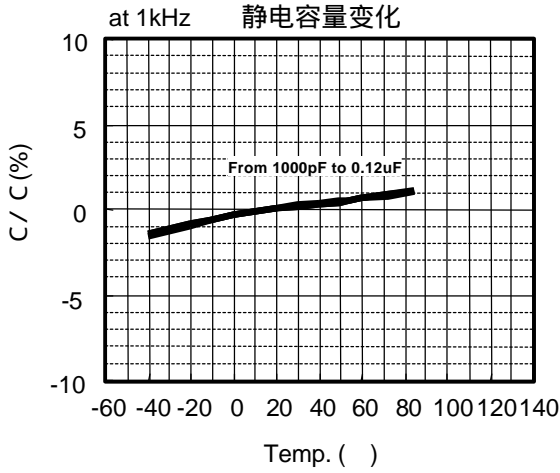


应用规格


电 流 容 值 (有效值)

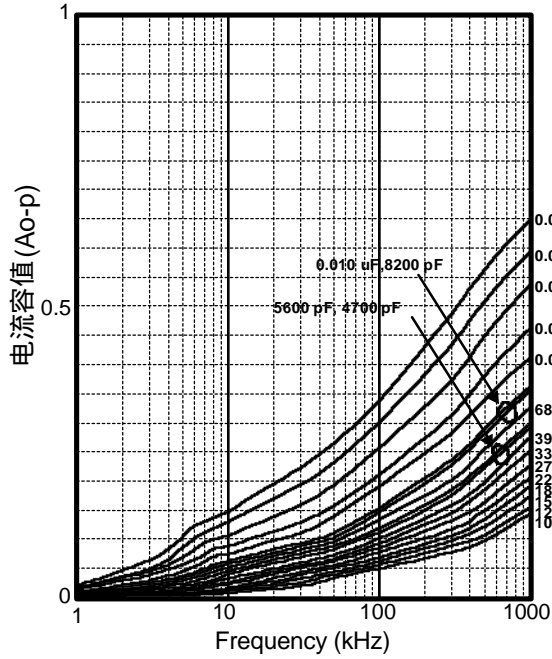


电 流 容 值 (有效值)

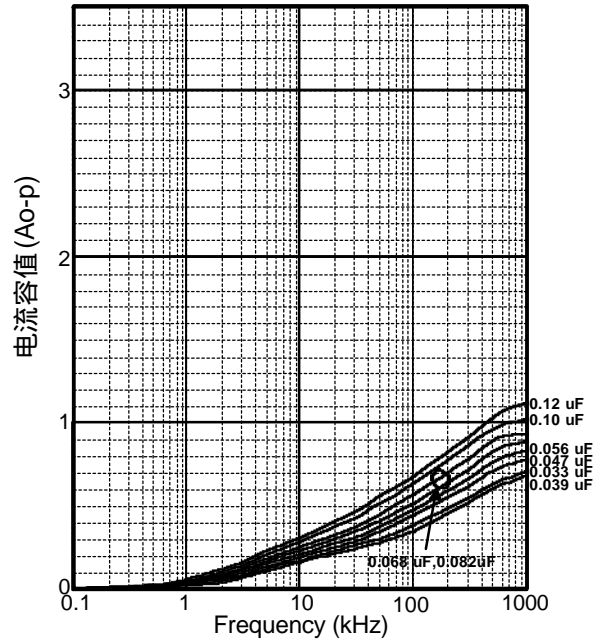

电 压 容 值 (正弦波)

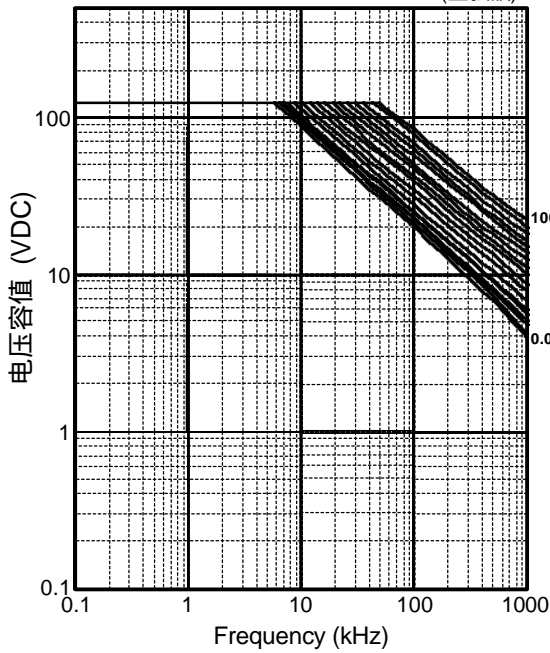

电 压 容 值 (正弦波)

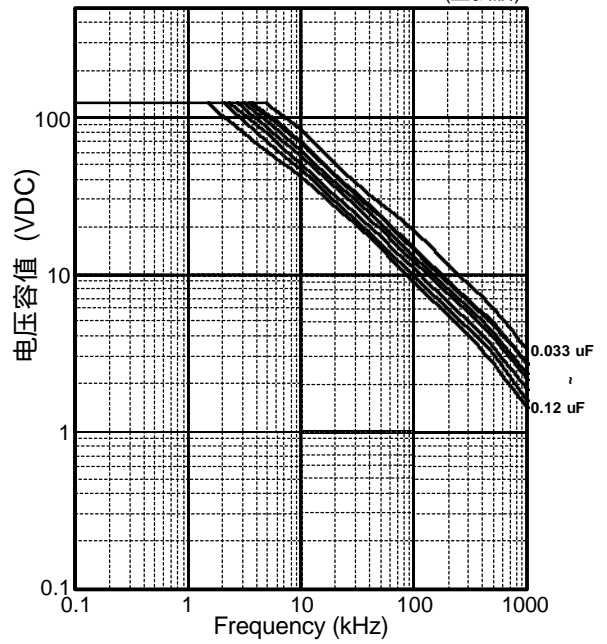

应用规格

相对脉冲电流的电流容值  
(脉冲次数 10,000 次以内)

额定电压	静电容量值 (μF)	代码	dv/dt(V/μs)	电流容值 (Ao-p)
250V DC	0.0010	102	615	0.62
	0.0012	122		0.74
	0.0015	152		0.92
	0.0018	182		1.11
	0.0022	222		1.35
	0.0027	272		1.66
	0.0033	332		2.03
	0.0039	392		2.40
	0.0047	472	360	1.69
	0.0056	562		2.02
	0.0068	682		2.45
	0.0082	822		2.95
	0.010	103		3.60
	0.012	123		4.32
	0.015	153		5.40
	0.018	183		6.48
	0.022	223		7.92
	0.027	273		9.72
	0.033	333		11.88

额定电压	静电容量值 (μF)	代码	dv/dt(V/μs)	电流容值 (Ao-p)
250V DC	0.039	393	240	9.36
	0.047	473		11.28
	0.056	563		13.44
	0.068	683		16.32
	0.082	823		19.68
	0.10	104		24.00
	0.12	124		28.80

额定电压下降低温度

