
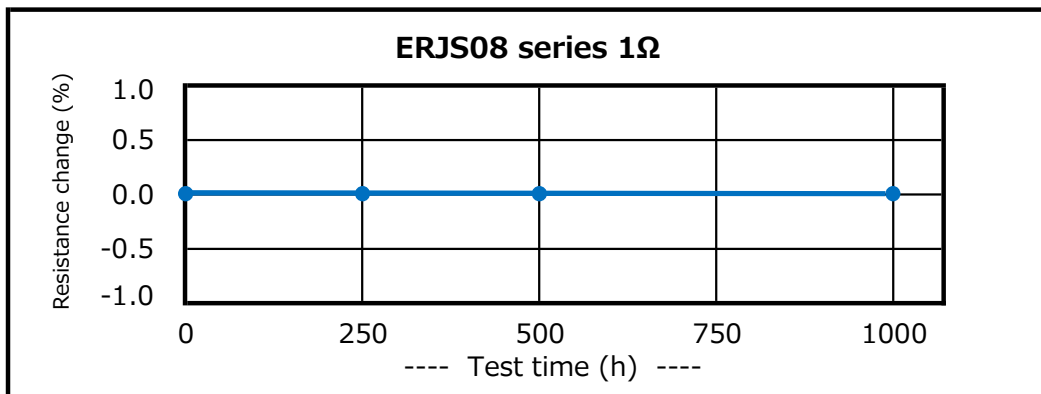
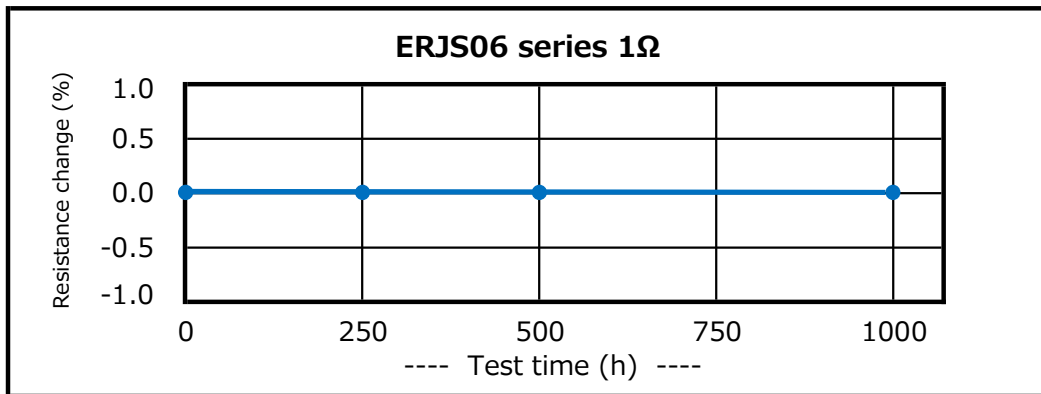
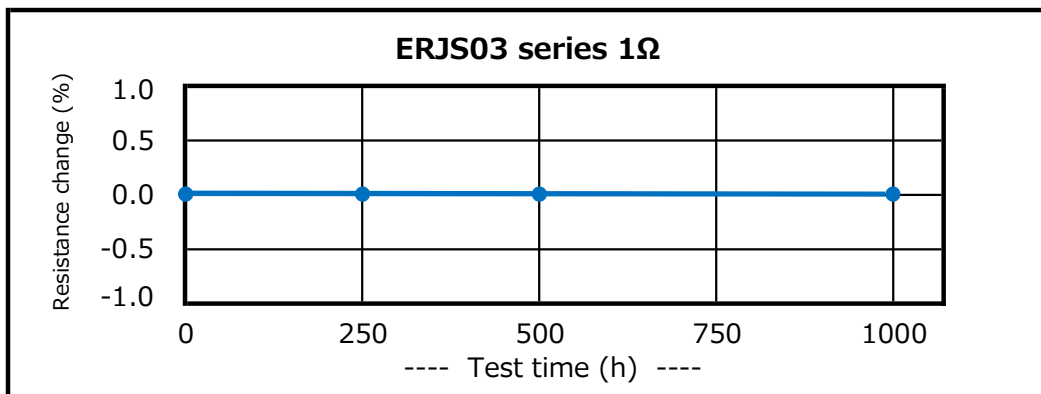


Sulfurization resistance data

● ERJS series

• Test condition : ASTM-B809-95 (50°C)




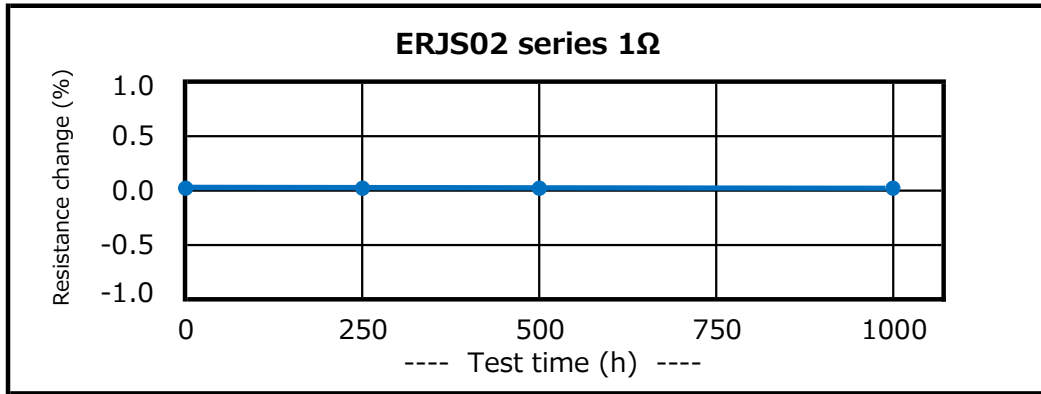


This data is reference characteristic data measured under Panasonic test method and it does not guarantee the performance / characteristics of this product. Therefore, please use it after sufficiently confirming its reliability under your using conditions.

Sulfurization resistance data

● ERJU series

• Test condition : ASTM-B809-95 (50°C)

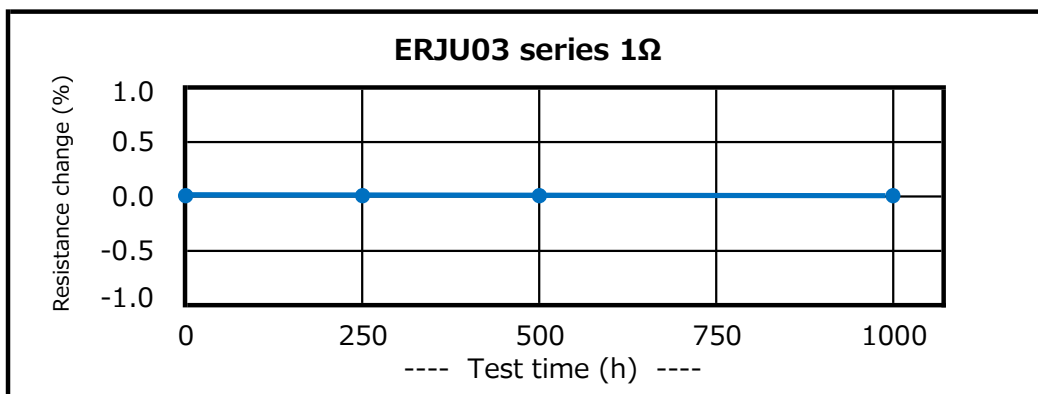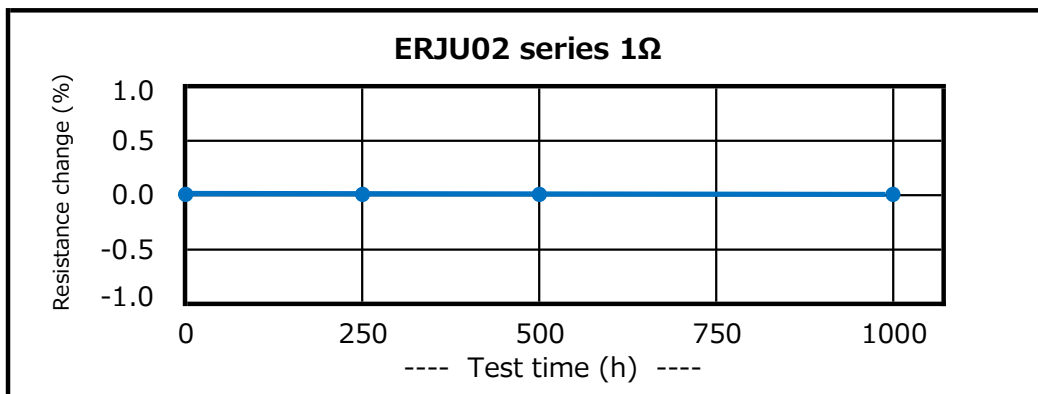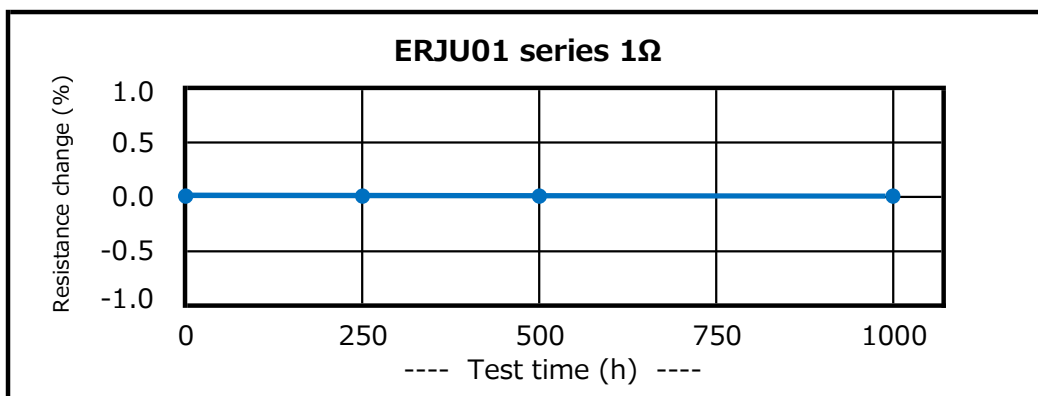
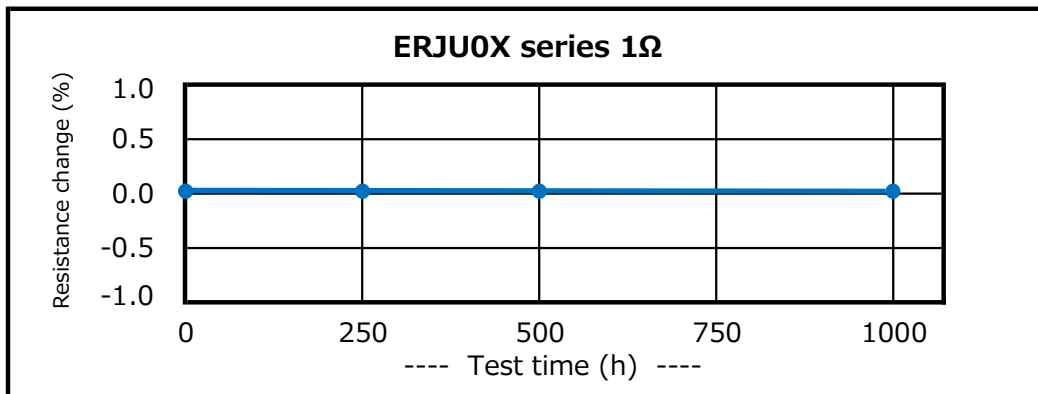


This data is reference characteristic data measured under Panasonic test method and it does not guarantee the performance / characteristics of this product. Therefore, please use it after sufficiently confirming its reliability under your using conditions.

Sulfurization resistance data

● ERJU series

• Test condition : ASTM-B809-95 (50°C)

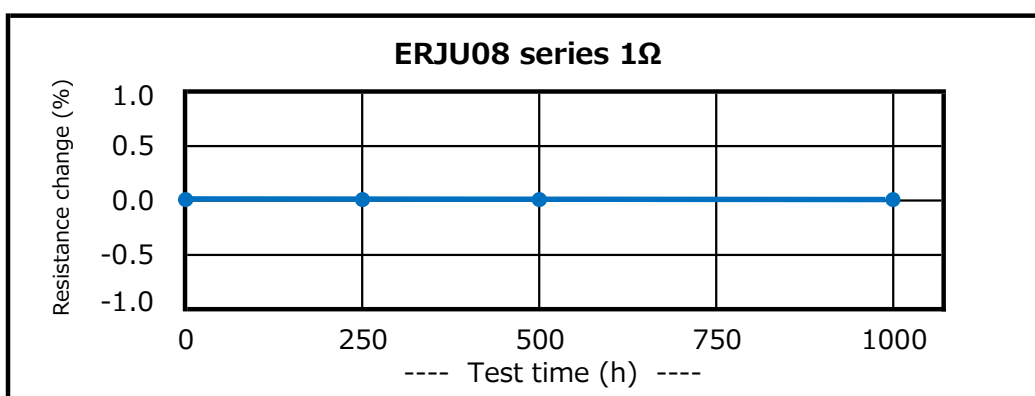
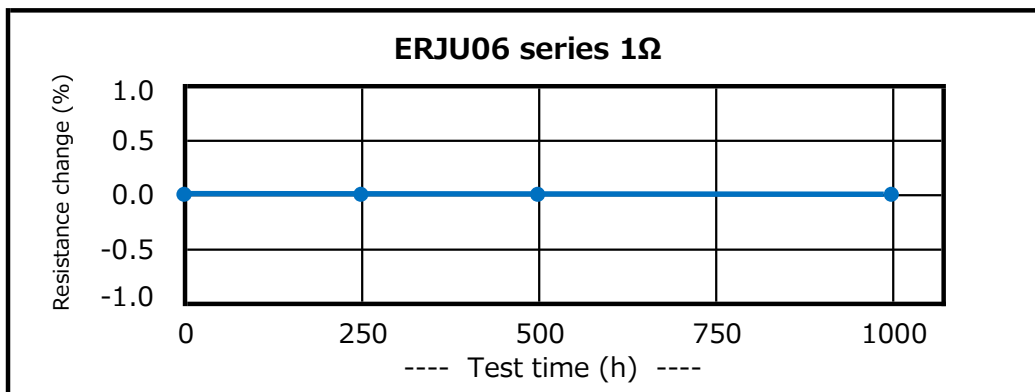


This data is reference characteristic data measured under Panasonic test method and it does not guarantee the performance / characteristics of this product. Therefore, please use it after sufficiently confirming its reliability under your using conditions.

Sulfurization resistance data

● ERJU6S,U6Q series

• Test condition : ASTM-B809-95 (50°C)

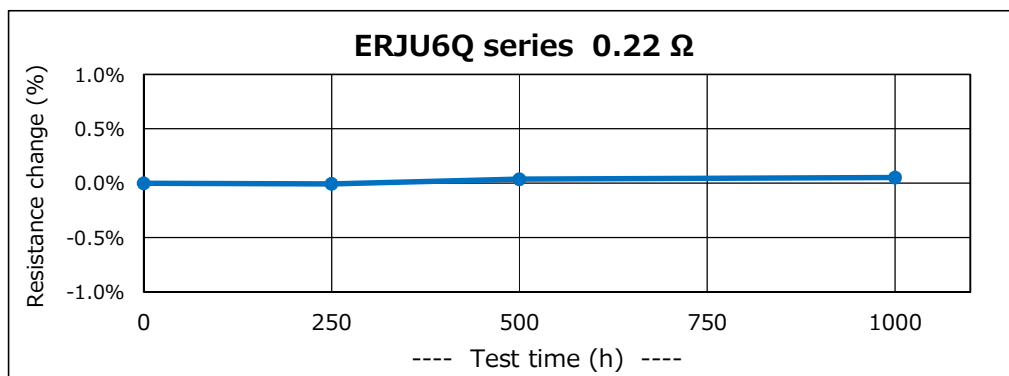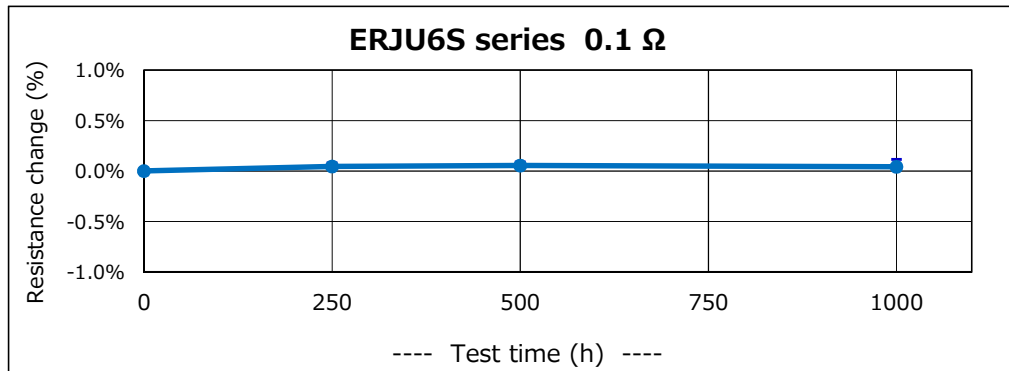

This data is reference characteristic data measured under Panasonic test method and it does not guarantee the performance / characteristics of this product. Therefore, please use it after sufficiently confirming its reliability under your using conditions.