

THIRD ANGLE PROJECTION

Part No.		Сар.		Dimensions							VOLUME
		μF	(*)	L	T	Н	F	d	Р	Q	(mm²)
ECWFJ	80205JA	2.0	(205)	31.5	10.5	21.0	27.5	0.8	0±1.0	2.00	6946
//	80225JA	2.2	(225)	//	11	11	11	11	"	//	"
//	80275JA	2.7	(275)	//	12.0	24.5	11	11	//	11	9261
//	80305JA	3.0	(305)	//	11	11	11	11	"	11	"
//	80335JA	3.3	(335)	//	//	11	11	11	//	11	"
//	80355JA	3.5	(355)	//	13.5	28.5	"	//	//	//	12120
//	80395JA	3.9	(395)	//	//	11	11	11	//	11	"
//	80405JA	4.0	(405)	//	//	11	11	11	"	11	"
//	80475JA	4.7	(475)	//	//	11	11	11	//	11	"
//	80505JA	5.0	(505)	//	16.0	29.5	11	//	"	11	14868
//	80565JA	5.6	(565)	//	//	11	11	//	//	11	11
//	80605JA	6.0	(605)	//	11	11	11	11	"	11	"
//	80685JA	6.8	(685)	//	17.5	32.5	11	11	//	11	17916
//	80705JA	7.0	(705)	//	11	11	11	11	"	//	"
11	80755JA	7.5	(755)	11	//	"	"	"	"	//	"
//	80805JA	8.0	(805)	11	//	11	11	11	"	11	11


MARKING EXAMPLE


WFJ205J 800V †




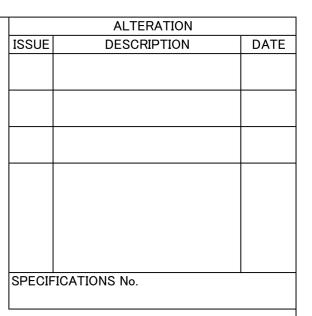

ITEM CODE NUMBER STRUCTURE

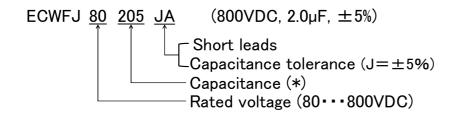

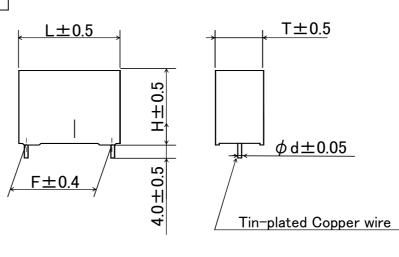

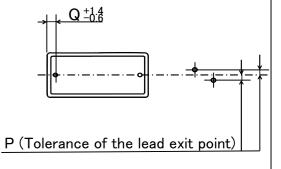

•F:Regulation of the root

The capacitor is of non-inductive construction, would with metallized polypropylene film dielectric.

The capacitor is enclosed in non-combustible polybutylene telephthalate case,

filled with non-combustible epoxy resin and has two leads.

MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage, and date code.

PROPERTIES

CONSTRUCTION

Capacitance : See table at 1kHz Capacitance tolerance : $\pm 5\%$ (J) at 1kHz

Rated voltage : 800VDC

(Derating of rated voltage by 1.0%/°C at more than 85 °C)

Withstand voltage (terminal-terminal) : 800VDC x 150% for 60s

Insulation resistance : $\geq 3000 \text{M}\Omega \cdot \mu\text{F}$ at 500VDC. 20°C for 60s

Dissipation factor : $\leq 0.1\%$ at 1kHz, 20°C

Category temperature range : From -40° C to $+110^{\circ}$ C

(including temperature rise on unit surface)

DO NOT SCALE DRAWING REVISIONS INDICATED BY Δ

PACKING QUANTITY

Capacitance range (µF)	quantity (pcs.)
2.0~2.2	300
2.7~3.3	250
3.5~4.7	150
5.0~8.0	100

QUANTITY OF MINIMUM ORDER

Capacitance range	quantity		
(μF)	(pcs.)		
2.0~2.2	300		
2.7~3.3	250		
3.5~4.7	150		
5.0~8.0	100		

Reference

DESIGN	OU
CHECKED	Li
APPROVAL	Yanagimoto
ESTABLISHMENT	Dec.2.2024

TYPE NAME

ECWFJ 80***JA

NAME Metallized Polypropylene
Film Capaciotr

DRAWING NAME

PRODUCT DRAWING

DRAWING No.

P012J⁻B⁻E

Film Capacitor Business Unit Device Solutions Business Division Panasonic Industry Co., Ltd.

ALL DIMENSIONS ARE IN MILLIMETERS