



ITEM CODE	CAP. μF (*)	DIMENSIONS						VOLUME (mm ³)
		L	T	H	H ₁	d		
ECWF2W104RJA	0.1 (104)	13.0	5.1	9.3	31.3	0.6	503	
" 2W124RJA	0.12 (124)	"	5.4	9.5	31.5	"	541	
" 2W154RJA	0.15 (154)	"	5.7	9.9	31.9	"	597	
" 2W184RJA	0.18 (184)	"	6.1	10.2	32.2	"	652	
" 2W224RJA	0.22 (224)	"	6.5	10.6	32.6	"	720	
" 2W274RJA	0.27 (274)	"	7.0	11.1	33.1	"	808	
" 2W334RJA	0.33 (334)	"	7.6	11.7	33.7	"	911	
" 2W394RJA	0.39 (394)	"	8.1	12.2	34.2	"	1014	
" 2W474RJA	0.47 (474)	"	8.7	12.9	34.9	"	1148	

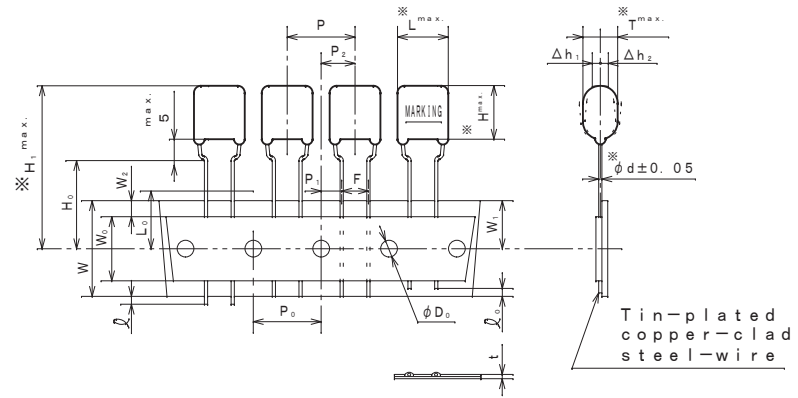

ALTERATION		
ISSUE	DESCRIPTION	DATE
△	Company name changed	Apr. 1 2012
△	Company name changed	Apr. 1 2013
△	Company name changed	Apr. 1 2015
△	Company name changed	Apr. 1 2022
SPECIFICATIONS No.		

ITEM CODE NUMBER STRUCTURE

ECWF 2W104RJA (450VDC, 0.1μF, ±5%)

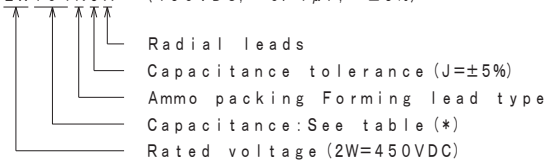

SYMBOL	ITEM	VALUE	TOLERANCE	REMARKS
P	Pitch of component	15.0	±1.0	Tilt of component and curvature of leads shall be included.
P ₀	Feed hole pitch	15.0	±0.2	
P ₁	Feed hole center to lead	3.75	±0.5	
P ₂	Hole center to comp. center	7.5	±1.3	Tilt of component due to curvature of leads shall be included.
F	Lead-to-lead distance	7.5	+0.8 -0.2	
Δh _{1,2}	Component alignment	0~2.0		Tilt of component due to curvature of leads shall be included.
W	Paper backing width	18.0	±0.5	
W ₀	Adhesive tape width	12.5	min.	The hold down tape shall not protrude beyond the carrier tape.
W ₁	Hole position	9.0	±0.5	
W ₂	Hold-down tape position	0~3.0		
H ₀	Lead-wire clinch height	16.0	+1.0	
ℓ	Lead wire protrusion	0	max.	
ℓ ₀	Lead wire depression	7.0	max.	
φD ₀	Feed hole diameter	4.0	±0.2	
t	Total tape thickness	0.7	±0.2	Total thickness including the hold down tape.
L ₀	Length of snapped lead	11.0	max.	

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polypropylene film dielectric.
The capacitor is enclosed in non-combustible epoxy resin and has two leads.


MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage, type name "WFA" and manufacturer's date code.

PROPERTIES

- *Capacitance : See table at 1kHz.
- *Capacitance tolerance : ±5% (J) at 1kHz.
- *Rated voltage : 450VDC
(Derating of rated voltage by 1.25%/°C at more than 85°C)
- *Withstand voltage (terminal-terminal) : 450VDC×150% for 60s
- *Insulation resistance : ≥30000MΩ (C≤0.33μF) at 100VDC, 20°C for 60s
: ≥10000MΩ·μF (C>0.33μF) at 100VDC, 20°C for 60s
- *Dissipation factor : ≤0.1% at 1kHz, 20°C
- *Category temperature range : From -40°C to +105°C
(including temperature rise on unit surface)


(example)



DESIGN	M. MEKADA
CHECKED	H. YAMADA
APPROVAL	T. KATO
ESTABLISHMENT	Jan. 6. 2009
TYPE NAME	
ECWF 2W***RJA	
NAME Metallized Polypropylene Film Capacitor	
DRAWING NAME	
PRODUCT DRAWING	
DRAWING No.	
8056J-J-E (1/2)	

Film Capacitor Business Unit
Device Solutions Business Division
Panasonic Industry Co., Ltd.

- Note 1. No more than 3 consecutive missing is permitted.
 Note 2. A tape conjunction and a tape discrepancy specify as follows.

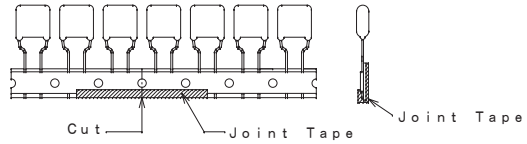


A tape sliding shall not exceed in an allowance of "P₀" dimension. A joint tape put on the back side of paper backing, and turn up the lower part to the front.

- Note 3. A tape trailer having at least 3 feed holes is required at the end of the tape.
 Note 4. Marking on components may not be the same side.
 Note 5. The tape adhesion is more than 3.92N (400gf) / 25mm.

Packing specification

1. Case size (Ammo pack)

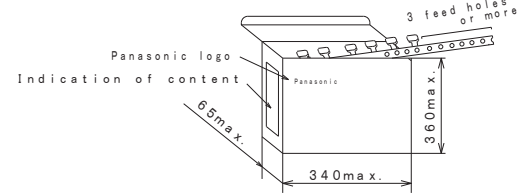

2. Packing quantity

Capacitance range (μF)	Quantity (pcs.)
0.1 ~ 0.12	1200
0.15 ~ 0.22	1000
0.27 ~ 0.39	800
0.47	600

Handling notes

- 1) One package must be packed one product only.
- 2) The storage must be stacked 5 boxes or less.
(Surface printed placing upward)
(For prevention from displacement of capacitors and damage of lead crimping)
- 3) The packing box must be handled with care and never thrown out.

REFERENCE


TYPE NAME	ECWF 2W***RJA
DRAWING No.	8056J-J-E (2/2)

Film Capacitor Business Unit
 Device Solutions Business Division
 Panasonic Industry Co., Ltd.

ITEM CODE	CAP. μF (*)	DIMENSIONS						VOLUME (mm ³)	MARKING STYLE	Note
		L	T	H	H ₁	d				
ECWF2W564RJA	0.56 (564)	18.1	7.0	11.5	33.5	0.8	1204	1		
" 2W684RJA	0.68 (684)	"	7.5	12.1	34.1	"	1359	"		
" 2W824RJA	0.82 (824)	"	8.2	12.7	34.7	"	1536	"		
" 2W105RJA	1.0 (105)	"	9.3	12.6	34.6	"	1696	"		
" 2W125RJA	1.2 (125)	18.8	9.7	14.7	36.7	"	2180	2	*	
" 2W155RJA	1.5 (155)	"	10.7	15.8	37.8	"	2566	"	*	
" 2W185RJA	1.8 (185)	"	11.6	16.7	38.7	"	2945	"	*	
" 2W225RJA	2.2 (225)	"	12.8	17.9	39.9	"	3444	"	*	

Note

*The specimen (the volume is more than 1750mm³) shall be satisfied with IEC60384-1 Inflammability Category B based on IEC60065, 1998~

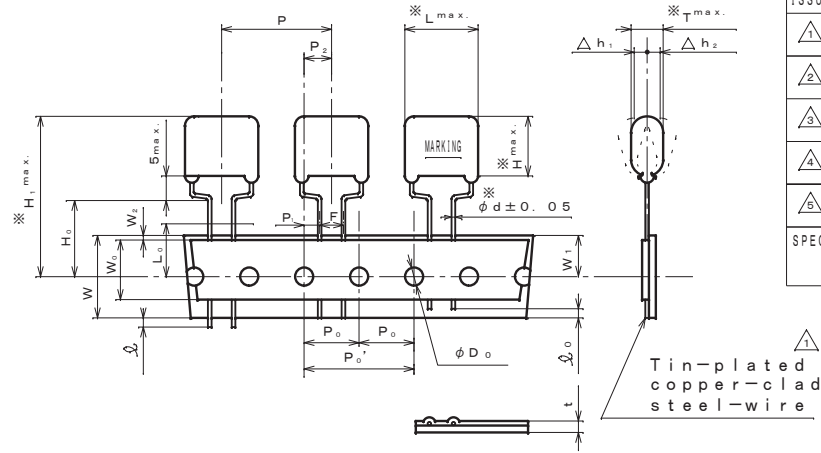


ALTERATION		
ISSUE	DESCRIPTION	DATE
△1	Modification	Dec. 7 2009
△2	Company name changed	Apr. 1 2012
△3	Company name changed	Apr. 1 2013
△4	Company name changed	Apr. 1 2015
△5	Company name changed	Apr. 1 2022

SPECIFICATIONS No.

ITEM CODE NUMBER STRUCTURE

ECWF 2W564RJA (450VDC, 0.56μF, ±5%)

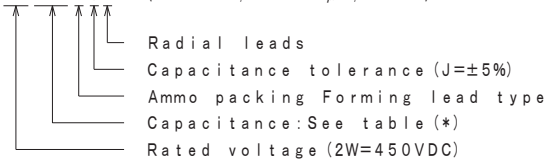

SYMBOL	ITEM	VALUE	TOLERANCE	REMARKS
P	Pitch of component	30.0	±1.0	Tilt of component and curvature of leads shall be included.
P ₀ '	Feed hole pitch	30.0	±0.2	
P ₀	Feed hole pitch	15.0	±0.2	
P ₁	Feed hole center to lead	3.75	±0.5	
P ₂	Hole center to comp. center	7.5	±1.3	Tilt of component due to curvature of leads shall be included.
F	Lead-to-lead distance	7.5	+0.8 -0.2	
Δh _{1,2}	Component alignment	0~2.0		Tilt of component due to curvature of leads shall be included.
W	Paper backing width	18.0	±0.5	
W ₀	Adhesive tape width	12.5	min.	The hold down tape shall not protrude beyond the carrier tape.
W ₁	Hole position	9.0	±0.5	
W ₂	Hold-down tape position	0~3.0		
H ₀	Lead-wire clinch height	16.0	+1.0 0	
φ	Lead wire protrusion	0	max.	
φ _p	Lead wire depression	7.0	max.	
φD ₀	Feed hole diameter	4.0	±0.2	
t	Total tape thickness	0.7	±0.2	Total thickness including the hold down tape.
L ₀	Length of snapped lead	11.0	max.	

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polypropylene film dielectric.

The capacitor is enclosed in non-combustible epoxy resin and has two leads.


MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage, type name "WFA", manufacturer's trademark and date code.

PROPERTIES

- *Capacitance : See table at 1kHz.
- *Capacitance tolerance : ±5% (J) at 1kHz.
- *Rated voltage : 450VDC
(Derating of rated voltage by 1.25%/°C at more than 85°C)
- *Withstand voltage (terminal-terminal) : 450VDC×150% for 60s
- *Insulation resistance : ≥10000MΩ·μF at 100VDC, 20°C for 60s
- *Dissipation factor : ≤0.1% at 1kHz, 20°C
- *Category temperature range : From -40°C to +105°C
(including temperature rise on unit surface)


(example)

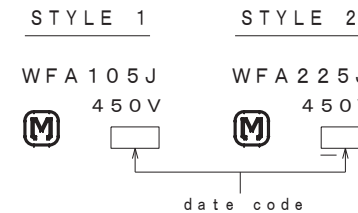

DESIGN	M. MEKADA
CHECKED	H. YAMADA
APPROVAL	T. KATO
ESTABLISHMENT	Jan. 6, 2009
TYPE NAME	
ECWF 2W***RJA	
NAME METALLIZED POLYPROPYLENE CAPACITOR	
DRAWING NAME	
PRODUCT DRAWING	
DRAWING No.	
8057J-J-E (1/2)	

Film Capacitor Business Unit
Device Solutions Business Division
Panasonic Industry Co., Ltd.

- Note 1. No more than 2 consecutive missing is permitted.
 Note 2. A tape conjunction and a tape discrepancy specify as follows.

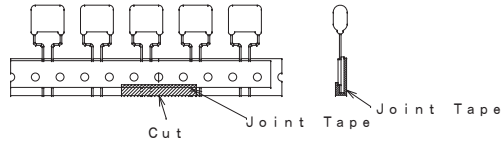


A tape sliding shall not exceed in an allowance of "P₀" dimension. A joint tape put on the back side of paper backing, and turn up the lower part to the front.

- Note 3. A tape trailer having at least 3 feed holes is required at the end of the tape.
 Note 4. Marking on components may not be the same side.
 Note 5. The tape adhesion is more than 3.92N (400gf) / 25mm.

Packing specification

1. Case size (Ammo pack)

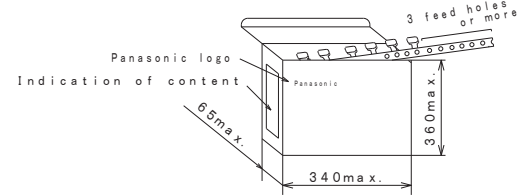

2. Packing quantity

Capacitance range (μF)	Quantity (pcs.)
0.56~0.82	400
1.0~1.5	300
1.8~2.2	200

Handling notes


- 1) One package must be packed one product only.
- 2) The storage must be stacked 5 boxes or less.
(Surface printed placing upward)
(For prevention from displacement of capacitors and damage of lead crimping)
- 3) The packing box must be handled with care and never thrown out.

REFERENCE

TYPE NAME	ECWF 2W***RJA
DRAWING No.	8057J-J-E (2/2)

Film Capacitor Business Unit
 Device Solutions Business Division
 Panasonic Industry Co., Ltd.


ITEM CODE	CAP. μF (*)	DIMENSIONS						VOLUME (mm ³)
		L	T	H	H ₁	d		
ECWF2W104RKA	0.1 (104)	13.0	5.1	9.3	31.3	0.6	503	
" 2W124RKA	0.12 (124)	"	5.4	9.5	31.5	"	541	
" 2W154RKA	0.15 (154)	"	5.7	9.9	31.9	"	597	
" 2W184RKA	0.18 (184)	"	6.1	10.2	32.2	"	652	
" 2W224RKA	0.22 (224)	"	6.5	10.6	32.6	"	720	
" 2W274RKA	0.27 (274)	"	7.0	11.1	33.1	"	808	
" 2W334RKA	0.33 (334)	"	7.6	11.7	33.7	"	911	
" 2W394RKA	0.39 (394)	"	8.1	12.2	34.2	"	1014	
" 2W474RKA	0.47 (474)	"	8.7	12.9	34.9	"	1148	

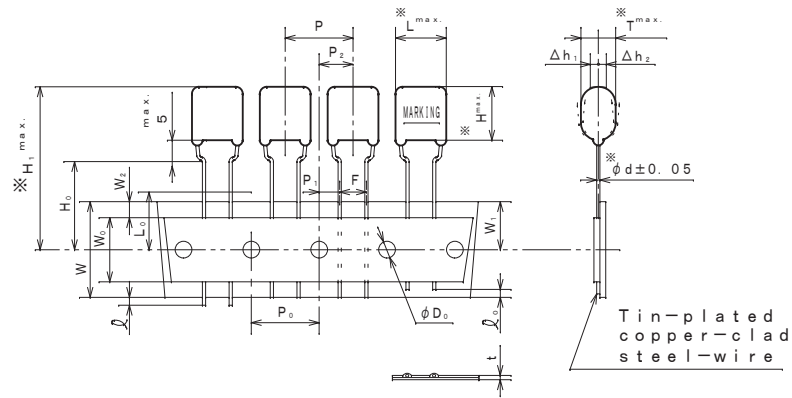

ALTERATION		
ISSUE	DESCRIPTION	DATE
△	Company name changed	Apr. 1 2012
△	Company name changed	Apr. 1 2013
△	Company name changed	Apr. 1 2015
△	Company name changed	Apr. 1 2022
SPECIFICATIONS No.		

ITEM CODE NUMBER STRUCTURE

ECWF 2W104RKA (450VDC, 0.1μF, ±10%)

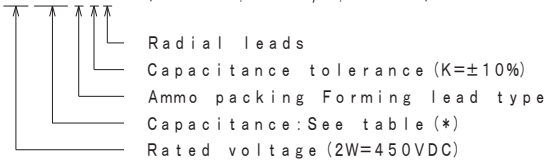

SYMBOL	ITEM	VALUE	TOLERANCE	REMARKS
P	Pitch of component	15.0	±1.0	Tilt of component and curvature of leads shall be included.
P ₀	Feed hole pitch	15.0	±0.2	
P ₁	Feed hole center to lead	3.75	±0.5	
P ₂	Hole center to comp. center	7.5	±1.3	Tilt of component due to curvature of leads shall be included.
F	Lead-to-lead distance	7.5	+0.8 -0.2	
Δh _{1,2}	Component alignment	0~2.0		Tilt of component due to curvature of leads shall be included.
W	Paper backing width	18.0	±0.5	
W ₀	Adhesive tape width	12.5	min.	The hold down tape shall not protrude beyond the carrier tape.
W ₁	Hole position	9.0	±0.5	
W ₂	Hold-down tape position	0~3.0		
H ₀	Lead-wire clinch height	16.0	+1.0 0	
ℓ	Lead wire protrusion	0	max.	
ℓ ₀	Lead wire depression	7.0	max.	
φD ₀	Feed hole diameter	4.0	±0.2	
t	Total tape thickness	0.7	±0.2	Total thickness including the hold down tape.
L ₀	Length of snapped lead	11.0	max.	

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polypropylene film dielectric.

The capacitor is enclosed in non-combustible epoxy resin and has two leads.

MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage, type name "WFA" and manufacturer's date code.

PROPERTIES

- *Capacitance : See table at 1kHz.
- *Capacitance tolerance : ±10% (K) at 1kHz.
- *Rated voltage : 450VDC
(Derating of rated voltage by 1.25%/°C at more than 85°C)
- *Withstand voltage (terminal-terminal) : 450VDC×150% for 60s
- *Insulation resistance : ≥300000MΩ (C≤0.33μF) at 100VDC, 20°C for 60s
: ≥100000MΩ·μF (C>0.33μF) at 100VDC, 20°C for 60s
- *Dissipation factor : ≤0.1% at 1kHz, 20°C
- *Category temperature range : From -40°C to +105°C
(including temperature rise on unit surface)


(example)

WFA 104K
450V
↑
date code

DESIGN	M. MURAKAMI
CHECK	H. YAMAMOTO
APPROVAL	T. KATO
ESTABLISHMENT	Sep. 24, 2008
TYPE NAME	
ECWF 2W***RKA	
NAME Metallized Polypropylene Film Capacitor	
DRAWING NAME	
PRODUCT DRAWING	
DRAWING No.	
8054J-J-E (1/2)	

Film Capacitor Business Unit
Device Solutions Business Division
Panasonic Industry Co., Ltd.

- Note 1. No more than 3 consecutive missing is permitted.
 Note 2. A tape conjunction and a tape discrepancy specify as follows.

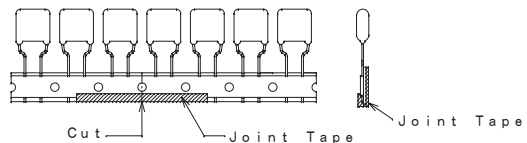


A tape sliding shall not exceed in an allowance of "P₀" dimension. A joint tape put on the back side of paper backing, and turn up the lower part to the front.

- Note 3. A tape trailer having at least 3 feed holes is required at the end of the tape.
 Note 4. Marking on components may not be the same side.
 Note 5. The tape adhesion is more than 3.92N (400gf) / 25mm.

Packing specification

1. Case size (Ammo pack)

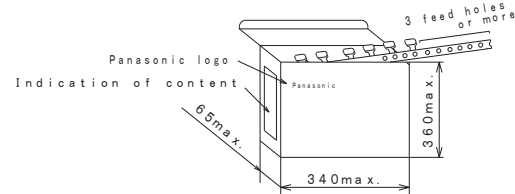

2. Packing quantity

Capacitance range (μF)	Quantity (pcs.)
0.1 ~ 0.12	1200
0.15 ~ 0.22	1000
0.27 ~ 0.39	800
0.47	600

Handling notes

- 1) One package must be packed one product only.
- 2) The storage must be stacked 5 boxes or less.
(Surface printed placing upward)
(For prevention from displacement of capacitors and damage of lead crimping)
- 3) The packing box must be handled with care and never thrown out.

REFERENCE


TYPE NAME	ECWF 2W***RKA
DRAWING No.	8054J-J-E (2/2)

Film Capacitor Business Unit
 Device Solutions Business Division
 Panasonic Industry Co., Ltd.

ITEM CODE	CAP. μF (*)	DIMENSIONS						VOLUME (mm ³)	MARKING STYLE	Note
		L	T	H	H ₁	d				
ECWF2W564RKA	0.56 (564)	18.1	7.0	11.5	33.5	0.8	1204	1		
" 2W684RKA	0.68 (684)	"	7.5	12.1	34.1	"	1359	"		
" 2W824RKA	0.82 (824)	"	8.2	12.7	34.7	"	1536	"		
" 2W105RKA	1.0 (105)	"	9.3	12.6	34.6	"	1696	"		
" 2W125RKA	1.2 (125)	18.8	9.7	14.7	36.7	"	2180	2	*	
" 2W155RKA	1.5 (155)	"	10.7	15.8	37.8	"	2566	"	*	
" 2W185RKA	1.8 (185)	"	11.6	16.7	38.7	"	2945	"	*	
" 2W225RKA	2.2 (225)	"	12.8	17.9	39.9	"	3444	"	*	

Note


*The specimen (the volume is more than 1750mm³) shall be satisfied with IEC60384-1 Inflammability Category B based on IEC60065, 1998~

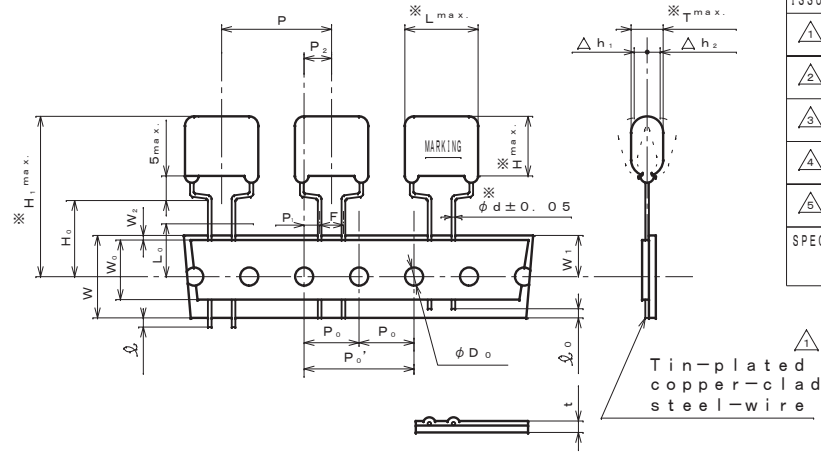

ALTERATION		
ISSUE	DESCRIPTION	DATE
△1	Modification	Dec. 7 2009
△2	Company name changed	Apr. 1 2012
△3	Company name changed	Apr. 1 2013
△4	Company name changed	Apr. 1 2015
△5	Company name changed	Apr. 1 2022

SPECIFICATIONS No.

ITEM CODE NUMBER STRUCTURE

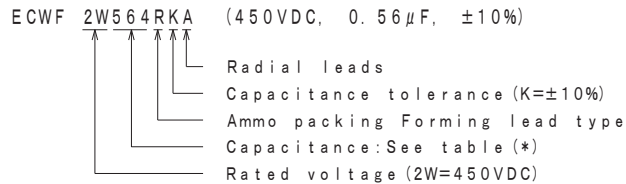

SYMBOL	ITEM	VALUE	TOLERANCE	REMARKS
P	Pitch of component	30.0	±1.0	Tilt of component and curvature of leads shall be included.
P ₀ '	Feed hole pitch	30.0	±0.2	
P ₀	Feed hole pitch	15.0	±0.2	
P ₁	Feed hole center to lead	3.75	±0.5	
P ₂	Hole center to comp. center	7.5	±1.3	Tilt of component due to curvature of leads shall be included.
F	Lead-to-lead distance	7.5	+0.8 -0.2	
Δh _{1,2}	Component alignment	0~2.0		Tilt of component due to curvature of leads shall be included.
W	Paper backing width	18.0	±0.5	
W ₀	Adhesive tape width	12.5	min.	The hold down tape shall not protrude beyond the carrier tape.
W ₁	Hole position	9.0	±0.5	
W ₂	Hold-down tape position	0~3.0		
H ₀	Lead-wire clinch height	16.0	+1.0 0	
φ	Lead wire protrusion	0	max.	
φ _p	Lead wire depression	7.0	max.	
φD ₀	Feed hole diameter	4.0	±0.2	
t	Total tape thickness	0.7	±0.2	Total thickness including the hold down tape.
L ₀	Length of snapped lead	11.0	max.	

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polypropylene film dielectric.
The capacitor is enclosed in non-combustible epoxy resin and has two leads.


MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage, type name "WFA", manufacturer's trademark and date code.

PROPERTIES

- *Capacitance : See table at 1kHz.
- *Capacitance tolerance : ±10% (K) at 1kHz.
- *Rated voltage : 450VDC
(Derating of rated voltage by 1.25%/°C at more than 85°C)
- *Withstand voltage (terminal-terminal) : 450VDC×150% for 60s
- *Insulation resistance : ≥10000MΩ·μF at 100VDC, 20°C for 60s
- *Dissipation factor : ≤0.1% at 1kHz, 20°C
- *Category temperature range : From -40°C to +105°C
(including temperature rise on unit surface)


(example)

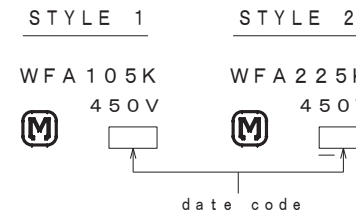

DESIGN	M. MEKADA
CHECKED	H. YAMADA
APPROVAL	T. KATO
ESTABLISHMENT	Sep. 24, 2008
TYPE NAME	
ECWF 2W***RKA	
NAME METALLIZED POLYPROPYLENE CAPACITOR	
DRAWING NAME	
PRODUCT DRAWING	
DRAWING No.	
8055J-J-E (1/2)	

Film Capacitor Business Unit
Device Solutions Business Division
Panasonic Industry Co., Ltd.

- Note 1. No more than 2 consecutive missing is permitted.
 Note 2. A tape conjunction and a tape discrepancy specify as follows.

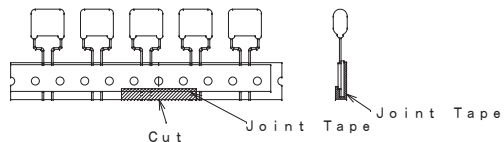


A tape sliding shall not exceed in an allowance of "P₀" dimension. A joint tape put on the back side of paper backing, and turn up the lower part to the front.

- Note 3. A tape trailer having at least 3 feed holes is required at the end of the tape.
 Note 4. Marking on components may not be the same side.
 Note 5. The tape adhesion is more than 3.92N (400gf) / 25mm.

Packing specification

1. Case size (Ammo pack)

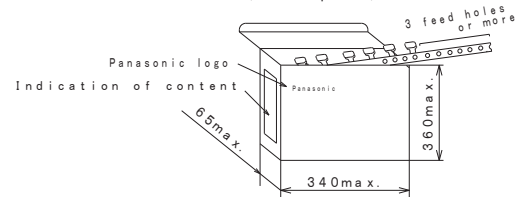

2. Packing quantity

Capacitance range (μF)	Quantity (pcs.)
0.56~0.82	400
1.0~1.5	300
1.8~2.2	200

Handling notes

- 1) One package must be packed one product only.
- 2) The storage must be stacked 5 boxes or less.
(Surface printed placing upward)
(For prevention from displacement of capacitors and damage of lead crimping)
- 3) The packing box must be handled with care and never thrown out.

REFERENCE

TYPE NAME	ECWF 2W***RKA
DRAWING No.	8055J-J-E (2/2)

Film Capacitor Business Unit
 Device Solutions Business Division
 Panasonic Industry Co., Ltd.