



ITEM CODE	CAPACITANCE		DIMENSIONS				
	μF	(*)	L	T	H	H ₁	d
ECWFD2W104 () 4	0.1	(104)	12.6	4.5	8.9	30.9	0.6
" 2W124 () 4	0.12	(124)	"	4.6	9.0	31.0	"
" 2W154 () 4	0.15	(154)	"	4.6	9.1	31.1	"
" 2W184 () 4	0.18	(184)	"	4.8	9.3	31.3	"
" 2W224 () 4	0.22	(224)	"	5.0	9.6	31.6	"
" 2W274 () 4	0.27	(274)	"	5.3	10.0	32.0	"
" 2W334 () 4	0.33	(334)	"	5.6	10.4	32.4	"
" 2W394 () 4	0.39	(394)	"	6.0	10.7	32.7	"

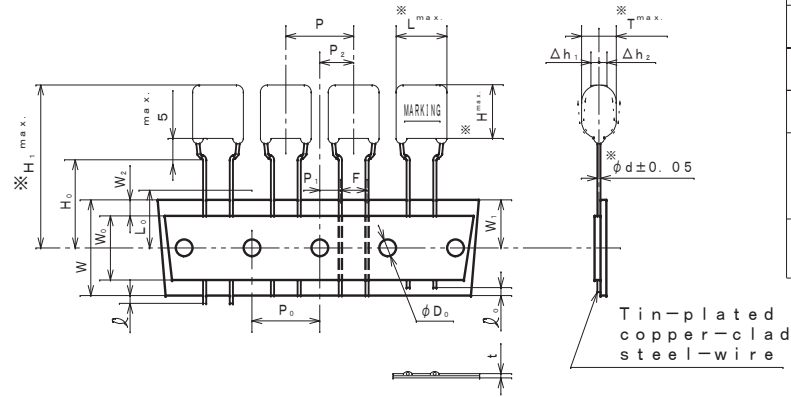


ALTERATION		
ISSUE	DESCRIPTION	DATE
△	Company name changed	Apr. 1 2013
△	Company name changed	Apr. 1 2016
△	Company name changed	Apr. 1 2022
SPECIFICATIONS No.		

ITEM CODE NUMBER STRUCTURE

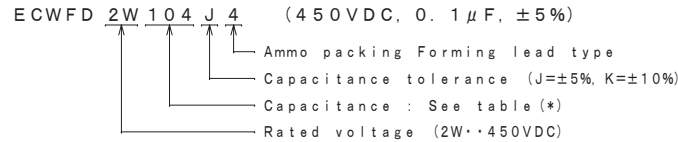

MARKING EXAMPLE



SYMBOL	ITEM	VALUE	TOLERANCE	REMARKS
P	Pitch of component	15.0	± 1.0	Tilt of component and curvature of leads shall be included.
P ₀	Feed hole pitch	15.0	± 0.2	
P ₁	Feed hole center to lead	3.75	± 0.5	
P ₂	Hole center to comp. center	7.5	± 1.3	Tilt of component due to curvature of leads shall be included.
F	Lead-to-lead distance	7.5	± 0.2	
$\Delta h_{1,2}$	Component alignment	0~2.0		Tilt of component due to curvature of leads shall be included.
W	Paper backing width	18.0	± 0.5	
W ₀	Adhesive tape width	12.5	min.	The hold down tape shall not protrude beyond the carrier tape.
W ₁	Hole position	9.0	± 0.5	
W ₂	Hold-down tape position	0~3.0		
H ₀	Lead-wire clinch height	16.0	± 1.0	
ϕ	Lead wire protrusion	0	max.	
ϕ_p	Lead wire depression	7.0	max.	
ϕD_0	Feed hole diameter	4.0	± 0.2	
t	Total tape thickness	0.7	± 0.2	Total thickness including the hold down tape.
L ₀	Length of snapped lead	11.0	max.	

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polypropylene film dielectric.
The capacitor is enclosed in non-combustible epoxy resin and has two leads.

MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage and date code.

PROPERTIES

- *Capacitance : See table at 1kHz.
- *Capacitance tolerance : $\pm 5\%$ (J), $\pm 10\%$ (K) at 1kHz.
- *Rated voltage : 450VDC
(Derating of rated voltage by 0.62%/°C at more than 85°C)
- *Withstand voltage (terminal-terminal) : 450VDC $\times 150\%$ for 60s
- *Insulation resistance : $\geq 30000M\Omega$ (C $\leq 0.33\mu F$) at 100VDC, 20°C for 60s
: $\geq 10000M\Omega \cdot \mu F$ (C $> 0.33\mu F$) at 100VDC, 20°C for 60s
- *Dissipation factor : $\leq 0.1\%$ at 1kHz, 20°C
- *Category temperature range : From -40°C to +110°C
(including temperature rise on unit surface)


QUANTITY of MINIMUM ORDER

Capacitance range (μF)	Quantity (pcs.)
0.1 ~ 0.15	1400
0.18	1300
0.22~ 0.27	1200
0.33	1100
0.39	1000

DESIGN	M. MEKADA
CHECKED	H. YAMADA
APPROVAL	T. KATO
ESTABLISHMENT	Nov. 22, 2012
TYPE NAME	
ECWFD2W*** () 4	
NAME METALLIZED POLYPROPYLENE CAPACITOR	
DRAWING NAME	
PRODUCT DRAWING	
DRAWING No.	
B088J-J-E (1/2)	

Film Capacitor Business Unit
Device Solutions Business Division
Panasonic Industry Co., Ltd.

- Note 1. No more than 3 consecutive missing is permitted.
 Note 2. A tape conjunction and a tape discrepancy specify as follows.

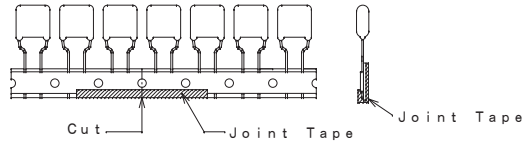


A tape sliding shall not exceed in an allowance of "P₀" dimension. A joint tape put on the back side of paper backing, and turn up the lower part to the front.

- Note 3. A tape trailer having at least 3 feed holes is required at the end of the tape.
 Note 4. Marking on components may not be the same side.
 Note 5. The tape adhesion is more than 3.92N (400gf) / 25mm.

Packing specification

1. Case size (Ammo pack)

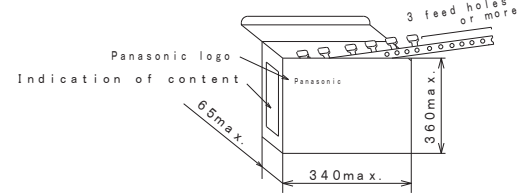

2. Packing quantity

Capacitance range (μF)	Quantity (pcs.)
0.1 ~ 0.15	1400
0.18	1300
0.22 ~ 0.27	1200
0.33	1100
0.39	1000

Handling notes

- 1) One package must be packed one product only.
- 2) The storage must be stacked 5 boxes or less.
(Surface printed placing upward)
(For prevention from displacement of capacitors and damage of lead crimping)
- 3) The packing box must be handled with care and never thrown out.


REFERENCE

TYPE NAME	ECWFD2W*** () 4
DRAWING No.	B088J-J-E (2/2)


Film Capacitor Business Unit
 Device Solutions Business Division
 Panasonic Industry Co., Ltd.

ITEM CODE	CAPACITANCE		DIMENSIONS					VOLUME (mm ³)
	μF	(*)	L	T	H	H ₁	d	
ECWFD2W474 () 4	0.47	(474)	17.5	5.8	9.0	31.0	0.8	787
" 2W564 () 4	0.56	(564)	"	6.2	9.4	31.4	"	874
" 2W684 () 4	0.68	(684)	"	6.7	9.9	31.9	"	987
" 2W824 () 4	0.82	(824)	"	7.2	10.4	32.4	"	1116
" 2W105 () 4	1.0	(105)	"	7.8	11.0	33.0	"	1279
" 2W125 () 4	1.2	(125)	"	8.5	11.6	33.6	"	1457
" 2W155 () 4	1.5	(155)	"	9.3	12.5	34.5	"	1718
" 2W185 () 4	1.8	(185)	"	10.1	13.3	35.3	"	1975
" 2W225 () 4	2.2	(225)	"	11.1	14.3	36.3	"	2313

ITEM CODE NUMBER STRUCTURE

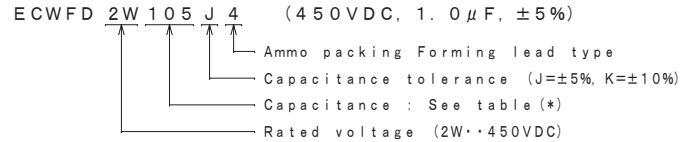

MARKING EXAMPLE



CONSTRUCTION


The capacitor is of non-inductive construction, wound with metallized polypropylene film dielectric.
The capacitor is enclosed in non-combustible epoxy resin and has two leads.

MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage and date code.

PROPERTIES

- *Capacitance: See table at 1kHz.
- *Capacitance tolerance: $\pm 5\%$ (J), $\pm 10\%$ (K) at 1kHz.
- *Rated voltage: 450VDC
- Δ (Derating of rated voltage by 0.62%/°C at more than 85°C)
- *Withstand voltage (terminal-terminal): 450VDC \times 150s for 60s
- *Insulation resistance: $\geq 10000M\Omega \cdot \mu F$ at 100VDC, 20°C for 60s
- *Dissipation factor: $\leq 0.1\%$ at 1kHz, 20°C
- *Category temperature range: Δ From -40°C to +110°C (including temperature rise on unit surface)

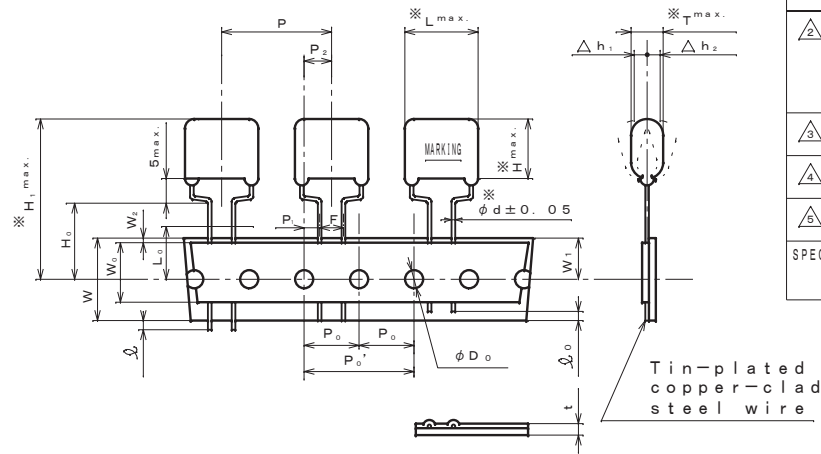

SYMBOL	ITEM	VALUE	TOLERANCE	REMARKS
P	Pitch of component	30.0	± 1.0	Tilt of component and curvature of leads shall be included.
P ₀ '	Feed hole pitch	30.0	± 0.2	
P ₀	Feed hole pitch	15.0	± 0.2	
P ₁	Feed hole center to lead	3.75	± 0.5	
P ₂	Hole center to comp. center	7.5	± 1.3	Tilt of component due to curvature of leads shall be included.
F	Lead-to-lead distance	7.5	± 0.2	
$\Delta h_{1,2}$	Component alignment	0~2.0		Tilt of component due to curvature of leads shall be included.
W	Paper backing width	18.0	± 0.5	
W ₀	Adhesive tape width	12.5	min.	The hold down tape shall not protrude beyond the carrier tape.
W ₁	Hole position	9.0	± 0.5	
W ₂	Hold-down tape position	0~3.0		
H ₀	Lead-wire clinch height	16.0	± 0.0	
ϕ	Lead wire protrusion	0	max.	
ϕ_p	Lead wire depression	7.0	max.	
ϕD_0	Feed hole diameter	4.0	± 0.2	
t	Total tape thickness	0.7	± 0.2	Total thickness including the hold down tape.
L ₀	Length of snapped lead	11.0	max.	

QUANTITY of MINIMUM ORDER

Capacitance range (μF)	Quantity (pcs.)
0.47 ~ 0.56	500
0.68 ~ 1.0	400
1.2 ~ 1.8	300
2.2	200


ALTERATION		
ISSUE	DESCRIPTION	DATE
Δ	Company name changed Correction	Apr. 1 2012
Δ	Change: category temperature range (+105°C~+110°C) Derating of rated voltage (1.25%/°C~0.62%/°C)	Jul. 9 2012
Δ	Company name changed	Apr. 1 2013
Δ	Company name changed	Apr. 1 2015
Δ	Company name changed	Apr. 1 2022

SPECIFICATIONS No.

DESIGN	M. MEKADA
CHECKED	H. YAMADA
APPROVAL	T. KATO
ESTABLISHMENT	Mar. 19, 2012
TYPE NAME	
ECWFD2W*** () 4	
NAME METALLIZED POLYPROPYLENE CAPACITOR	
DRAWING NAME PRODUCT DRAWING	
DRAWING No. B023J-J-E (1/2)	


Film Capacitor Business Unit
Device Solutions Business Division
Panasonic Industry Co., Ltd.

- Note 1. No more than 2 consecutive missing is permitted.
 Note 2. A tape conjunction and a tape discrepancy specify as follows.

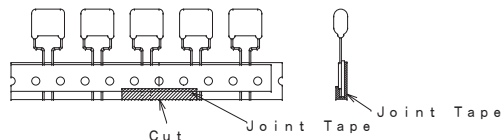


A tape sliding shall not exceed in an allowance of "P₀" dimension. A joint tape put on the back side of paper backing, and turn up the lower part to the front.

- Note 3. A tape trailer having at least 3 feed holes is required at the end of the tape.
 Note 4. Marking on components may not be the same side.
 Note 5. The tape adhesion is more than 3.92N (400gf) / 25mm.
 Note 6. The lead clinch at the tape, shows as follows.



Packing specification

1. Case size (Ammo pack)

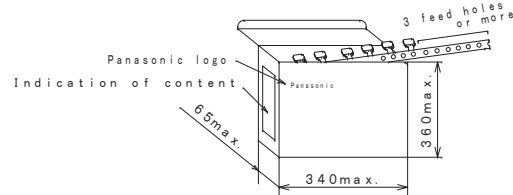

2. Packing quantity

Capacitance range (μF)	Quantity (pcs.)
0.47~0.56	500
0.68~1.0	400
1.2~1.8	300
2.2	200

Handling notes

- 1) One package must be packed one product only.
- 2) The storage must be stacked 5 boxes or less.
(Surface printed placing upward)
(For prevention from displacement of capacitors and damage of lead crimping)
- 3) The packing box must be handled with care and never thrown out.


REFERENCE

TYPE NAME	ECWFD2W*** () 4
DRAWING No.	B023J-J-E (2/2)

Film Capacitor Business Unit
 Device Solutions Business Division
 Panasonic Industry Co., Ltd.

ITEM CODE	CAPACITANCE μF (*)	DIMENSIONS					VOLUME (mm ³)
		L	T	H	H ₁	d	
ECWFD2W474**	0.47 (474)	12.6	6.5	11.2	33.2	0.6	806
" 2W684**	0.68 (684)	"	7.7	12.4	34.2	"	1040
" 2W105**	1.0 (105)	"	9.2	13.9	35.9	"	1368

P4=±5% (J)
Q4=±10% (K)

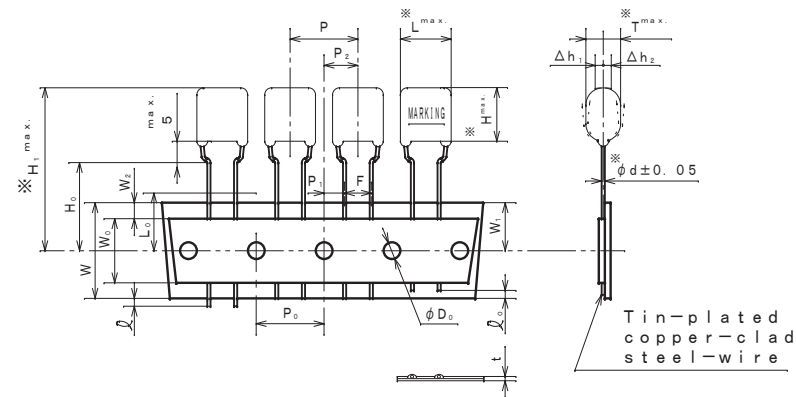

MARKING EXAMPLE

WFD2W
474J
↑
date code

SYMBOL	ITEM	VALUE	TOLERANCE	REMARKS
P	Pitch of component	15.0	±1.0	Tilt of component and curvature of leads shall be included.
P ₀	Feed hole pitch	15.0	±0.2	
P ₁	Feed hole center to lead	3.75	±0.5	
P ₂	Hole center to comp. center	7.5	±1.3	Tilt of component due to curvature of leads shall be included.
F	Lead-to-lead distance	7.5	+0.8 -0.2	
Δh _{1,2}	Component alignment	0~2.0		Tilt of component due to curvature of leads shall be included.
W	Paper backing width	18.0	±0.5	
W ₀	Adhesive tape width	12.5	min.	The hold down tape shall not protrude beyond the carrier tape.
W ₁	Hole position	9.0	±0.5	
W ₂	Hold-down tape position	0~3.0		
H ₀	Lead-wire clinch height	16.0	+1.0	
ℓ	Lead wire protrusion	0	max.	
ℓ _p	Lead wire depression	7.0	max.	
φD ₀	Feed hole diameter	4.0	±0.2	
t	Total tape thickness	0.7	±0.2	Total thickness including the hold down tape.
L ₀	Length of snapped lead	11.0	max.	

ALTERATION		
ISSUE	DESCRIPTION	DATE
△	Addition Capacitance (684, 105)	Oct. 10 2013
△	Company name changed	Apr. 1 2015
△	Company name changed	Apr. 1 2022
SPECIFICATIONS No.		

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polypropylene film dielectric.
The capacitor is enclosed in non-combustible epoxy resin and has two leads.

MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage and date code.

PROPERTIES

- *Capacitance : See table at 1kHz.
- *Capacitance tolerance : ±5% (J), ±10% (K) at 1kHz.
- *Rated voltage : 450VDC
(Derating of rated voltage by 0.62%/°C at more than 85°C)
- *Withstand voltage (terminal-terminal) : 450VDCx150% for 60s
- *Insulation resistance : ≥10000MΩ·μF at 100VDC, 20°C for 60s
- *Dissipation factor : ≤0.1% at 1kHz, 20°C
- *Category temperature range : From -40°C to +110°C
(including temperature rise on unit surface)


QUANTITY of MINIMUM ORDER

Capacitance range (μF)	Quantity (pcs.)
0.47	900
0.68	700
1.0	600

DESIGN	M. MEKADA
CHECKED	Y. NISHIDA
APPROVAL	T. KATO
ESTABLISHMENT	Jul. 19, 2013
TYPE NAME ECWFD 2W***P4 ECWFD 2W***Q4	
NAME METALLIZED POLYPROPYLENE CAPACITOR	
DRAWING NAME PRODUCT DRAWING	
DRAWING No. B092J-J-E (1/2)	


Film Capacitor Business Unit
Device Solutions Business Division
Panasonic Industry Co., Ltd.

- Note 1. No more than 3 consecutive missing is permitted.
 Note 2. A tape conjunction and a tape discrepancy specify as follows.

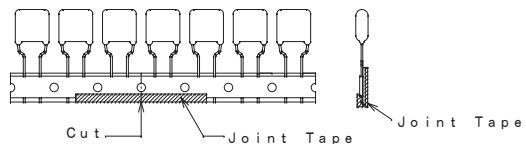


A tape sliding shall not exceed in an allowance of "P₀" dimension. A joint tape put on the back side of paper backing, and turn up the lower part to the front.

- Note 3. A tape trailer having at least 3 feed holes is required at the end of the tape.
 Note 4. Marking on components may not be the same side.
 Note 5. The tape adhesion is more than 3.92N (400gf) / 25mm.
 Note 6. The lead clinch at the tape, shows as follows.



Packing specification

1. Case size (Ammo pack)

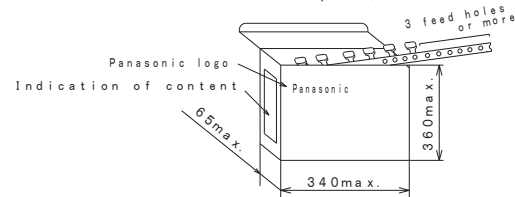

2. Packing quantity

Capacitance range (μF)	Quantity (pcs.)
0.47	900
0.68	700
1.0	600

Handling notes

- 1) One package must be packed one product only.
- 2) The storage must be stacked 5 boxes or less.
(Surface printed placing upward)
(For prevention from displacement of capacitors and damage of lead crimping)
- 3) The packing box must be handled with care and never thrown out.

REFERENCE

TYPE NAME
 ECWFD 2W***P4
 ECWFD 2W***Q4

DRAWING No.
 B092J-J-E (2/2)

Film Capacitor Business Unit
 Device Solutions Business Division
 Panasonic Industry Co., Ltd.